


U102E SERIES RANGE HOODS

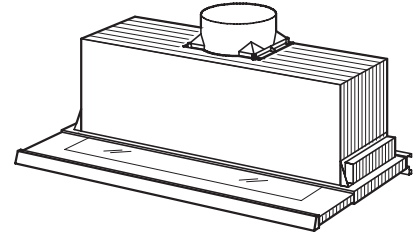

Slim-line design provides strong, effective ventilation and cooktop lighting unobtrusively.

FEATURES


- Italian design
- Cabinet mount
- Finish: 304 Stainless Steel #4 Brushed, White & Black
- Width: 30", 36" and 42"
- 8" round duct connector/backdraft damper
- Halogen lighting (2 x 20 watt, Type JC 12V 20W G4 Base - bulbs included) with multilevels from bright cooktop illumination to a low nighttime setting
- Advanced, electronic push-button controls
- Exterior mounted blower available in either 600, 900, 1200, or 1500 cfm
- Four-speed motor controls
- Delay timer control automatically shuts off range hood after ten minutes
- Special control indicates when it's time to clean the filter
- Dishwasher-safe filter features a quick-release latch and decorative cover plate
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected
- Pull out visor with clear glass panel

OPTIONS

- Replacement grease filters available
- Interior blower (Model U102I Series) available, providing 500 cfm exhaust
- 8" to 10" transition (Model 414)
- Replacement Bulb (Part No. SB02300891)

SPECIFICATIONS

WITH BLOWER MODEL	VOLTS	AMPS	CFM	DUCT
EB6	120	0.43	600	8" round at hood
EB9	120	(lights only)	900	8" round at hood
EB12	120	6.0 max.	1200	10" round at exterior blower
EB15	120	(blower)	1500	10" round at exterior blower

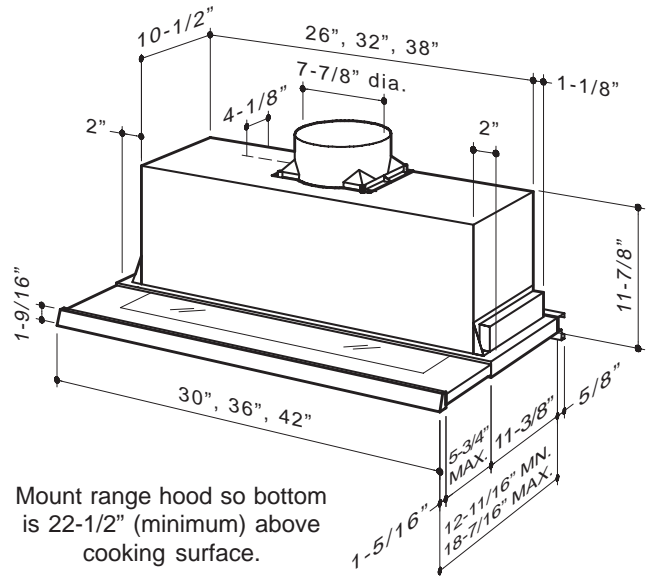


Mount range hood so bottom is 22-1/2" (minimum) above cooking surface.




BEST BY BROAN P.O. BOX 140 HARTFORD, WISCONSIN 53027

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date

U102E SERIES WIRING

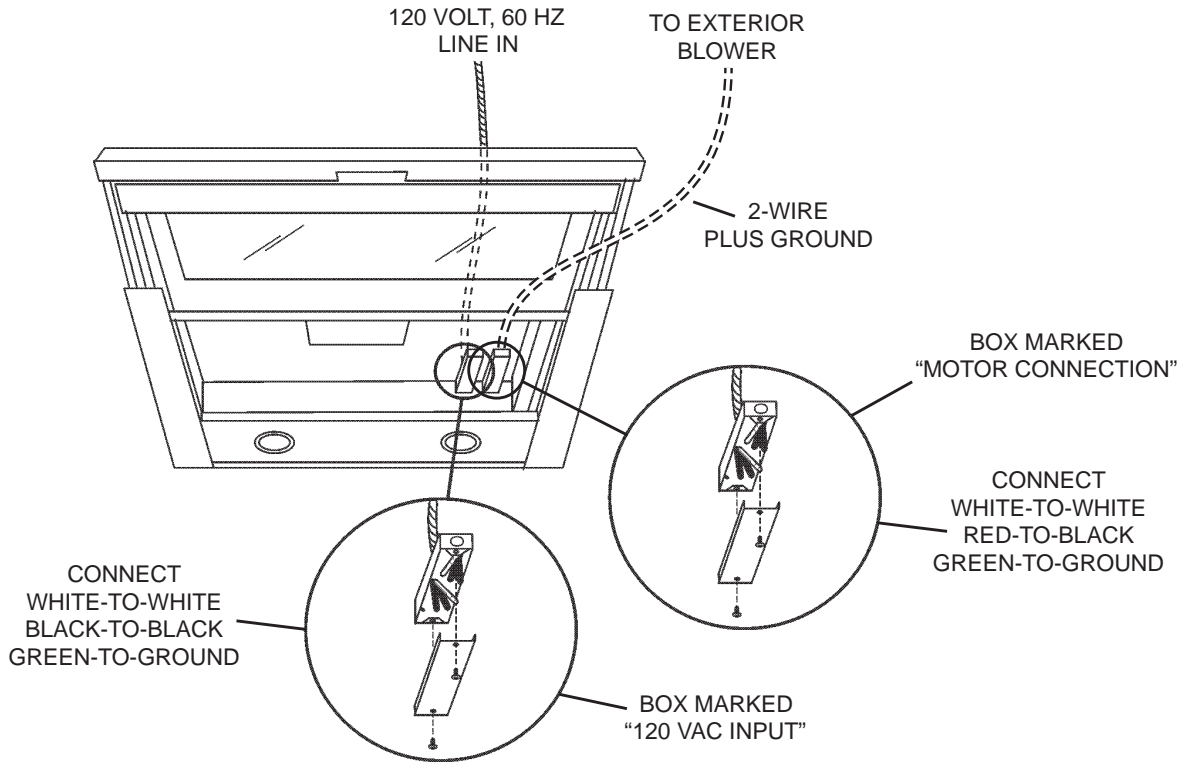

U102E SERIES MOUNTING

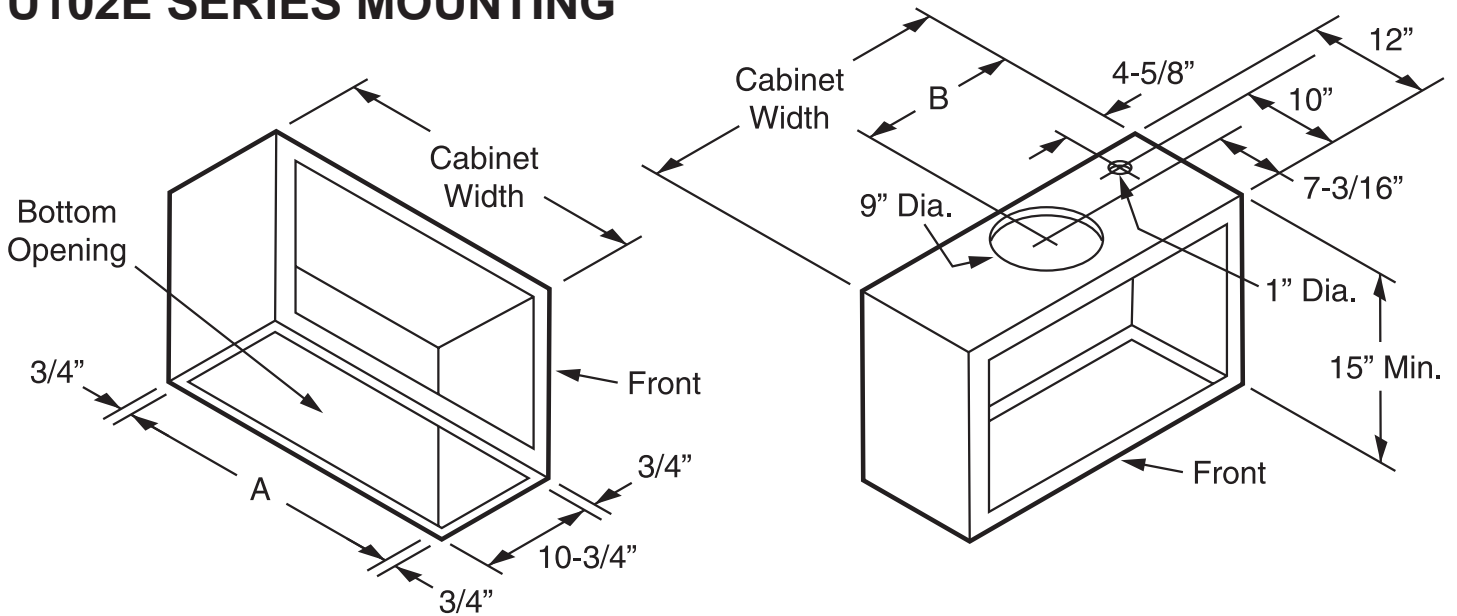

Cabinet Width	"A"	"B"
30"	28-1/2"	15"
36"	34-1/2"	18"
42"	40-1/2"	21"

