Thermador.★



INNOVATION

- Exclusive, patented Star® Burner most even heating, unsurpassed flame coverage
- QuickClean Base[™] designed for easy surface cleaning
- Precision simmering capabilities as low as 100°F (375 BTU) with 2 ExtraLow® Simmer burners

PERFORMANCE

- Professional style, continuous cast iron grates
- Continuous porcelain, easy to clean cooking surface
- Every burner 18,000 BTU (NG)
- Widest range of simmer options from 375 BTU to 3,000 BTU
- Star® design delivers superior heat spread for any size pan
- Simmer without stirring/scorching with exclusive ExtraLow®
- Superior griddle results-6 pass, 1630 watt electric griddle
- Titanium surface non-stick, rust-proof castaluminum griddle
- Grill accessory-thermostatically controlled for even heating
- Titanium surface non-stick, rust-proof castaluminum grill accessory
- Removable griddle and grill accessory for easy clean-up
- Powerful, 23,500 BTU bake and 20,000 BTU broil burners
- Convection Bake offers precise multi-level baking results
- Massive oven capacity of 4.4 cu.ft. plus 2.2 cu.ft. in small oven
- Six rack levels for multiple item cooking
- Full Access® telescopic racks, integrated easy-grip



handle


- Electronic oven control ensures precise heating
- Large oven door window for maximum viewing
- Powerful halogen lighting illuminates the oven cavity
- Sabbath mode

DESIGN

- Bold Professional design
- Truly Flush Mounted[™], 24" standard cabinet depth
- Patented Pedestal Star® Burner with QuickClean Base[™]
- Restaurant style metal knobs
- Signature blue indicator lighting
- 48" units ship standard with island trim included

48 inch Professional Series Pro Harmony® Standard Depth All Gas Range PRG486GDH

Thermador.★

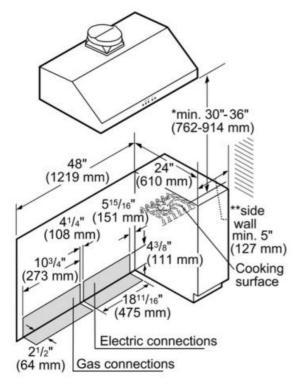


- * 30" (762 mm) minimum clearance above cooking surface to non-combustible surface. Minimum clearance above cooking surface to combustible surface is 36" (914 mm).
- ** 5" (127 mm) minimum clearance from sides of the cooker, above the cooking surface, to combustible side walls.
- Note: Most hoods contain combustible components that must be considered when planning the installation.

measurements in inches

| Amps (A) | 20 |
|----------------------------------|--|
| Frequency (Hz) | 60 |
| Gas type | Natural gas 15 mbar (USA) |
| Approval certificates | CSA |
| Type of grate | Cast iron |
| Included accessories | 1 x island trim, 1 x Broiler pan small, x Broiler pan |
| Location of 1st heating element | front left |
| Power of 1st heating element (W) | 5.27 |
| Location of 2nd heating element | back left |
| Power of 2nd heating element (W) | 5.27 |
| Location of 3rd heating element | middle back |
| Power of 3rd heating element (W) | 5.27 |
| Location of 6th heating element | rear first right |
| Power of 6th heating element (W) | 5.27 |
| | |
| | |
| | |





measurement in inches

1(800) 735-4328 | WWW.THERMADOR.COM | 1901 MAIN STREET, IRVINE, CA 92614 COPYRIGHT 2014 BSH HOME APPLIANCES CORPORATION, ALL RIGHTS RESERVED