

IVS1, IVS2, IVSR1, IVSR2




Renaissance® Integrated Ventilation System

PLANNING GUIDE


⚠ WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- This appliance must be installed in accordance with the accompanying installation instructions.

All tolerances: ±1/16" (±1.6 mm) unless otherwise stated.

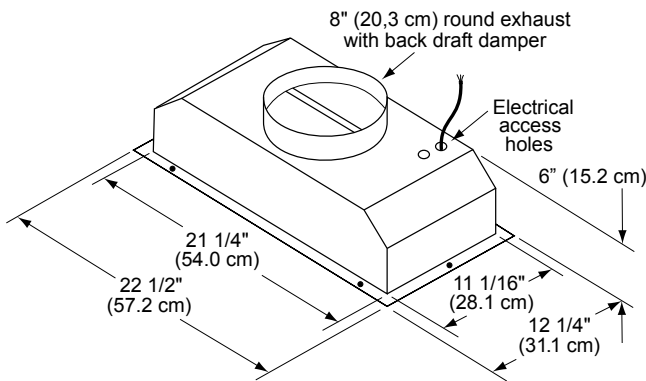


IVS1/IVSR1 OVERALL DIMENSIONS

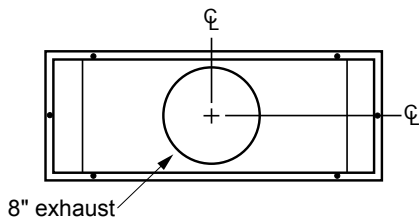


IVS1/IVSR1 EXHAUST DIMENSIONS - TOP VIEW

The Dacor IHL series integrated hood liner is designed for use with all Dacor IVS series integrated ventilation systems. Together the IVS and IHL series products can be built into a custom hood structure to provide the required ventilation and heat resistant, easy to clean surfaces.


IMPORTANT: Local building codes may require the use of makeup air systems with ventilation systems that move air greater than the specified movement rate (CFM). The specified rate varies based on locale. Consult a qualified HVAC specialist when designing the system for the requirements in your area and to assure optimal performance.

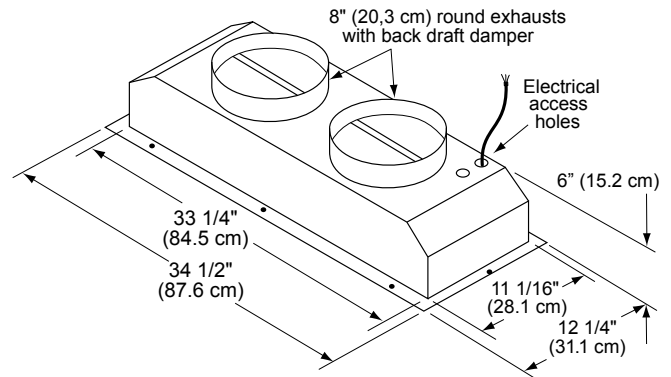

IVS2/IVSR2 OVERALL DIMENSIONS

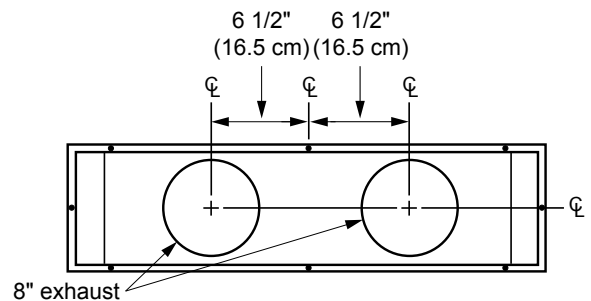

IVS2/IVSR2 EXHAUST DIMENSIONS - TOP VIEW

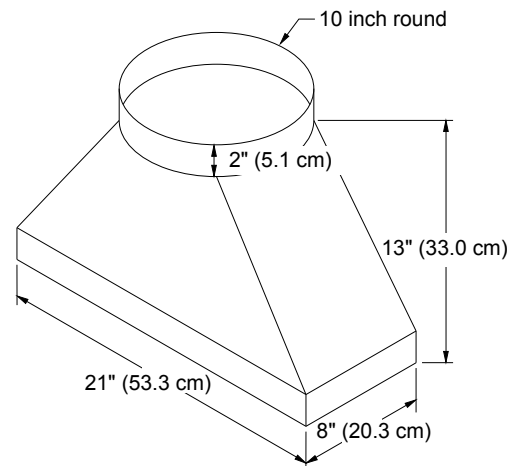

**ATD10 DIMENSIONS - FOR USE WITH IVS2 AND IVSR2
(SOLD SEPARATELY)**

Model No.	Dedicated Circuit Required	Maximum Duct Length	Total Connected Load	Blower Configuration	Blower Rating	Approximate Shipping Weight
IVS1	120 Vac, 60 Hz., 15 Amp. Min. grounded, dedicated circuit	Maximum 60 equivalent straight feet	0.2 kW (2 Amp.)	Internal	600 CFM Nom.	25 lbs.
IVSR1			0.2 kW (1.5 Amp.)*	Remote**	See REMP specifications	21 lbs.
IVS2			0.4 kW (3 Amp.)	Internal	1200 CFM Nom.	38 lbs.
IVSR2			0.2 kW (1.5 Amp.)*	Remote**	See REMP specifications	29 lbs.

* Does not include remote blower.

** Remote blower required. Use only Dacor REMP series remote blower

*** At zero inches static pressure

