

36" Range Wall Hood

Model: DAR 1230



DAR 1230

Features:

- Vented or Recirculating Option
- Recessed knob controls
- M Pro Stainless Steel
- Dishwasher-safe stainless steel Baffle Filters
- 4 Fan speeds including Intensive
- Hood interior with CleanCover
- LED ClearView lighting
- Auto-Vent safety sensor

SPECIFICATIONS

DAR 1230 — Item 28123050USA

Overall Unit Width	35 ⁷ / ₈ " (914mm)
Overall Height without duct cover	18" (457mm)
Overall Unit Depth	24 ¹ / ₁₆ " (611mm)
Minimum distance above rangetop	Please refer to installation manual

Lighting

Number of lights and wattage 3 LED lights @ 2 watts each

Electrical

Electrical Requirements 120V, 60Hz, 15 Amps

Power Cord Yes - NEMA 5-15 plug

Shipping

Shipping Weight 103.6 lbs. (47kg)

Support

Call 800.843.7231

Recommended Combinations		INTERNAL BLOWER		EXTERNAL BLOWER	
		700 CFM DRIB XL	1100 CFM DRIB XXL	700 CFM DREB XL	1100 CFM DREB XXL
30"	DAR 1120 DAR 1220 ²	●		●	
36"	DAR 1130 DAR 1230 ²	● ¹	●	● ¹	●
48"	DAR 1150 DAR 1250		●		●

¹Can not be combined with HR 1134 G/LP, HR 1934 DF G/LP, KMR 1134 G/LP


²Recirculating kit can only be used in conjunction with DRIB XL 700 CFM Internal Blower

36" Range Wall Hood Model: DAR 1230



PRODUCT VIEW

Duct Cover options

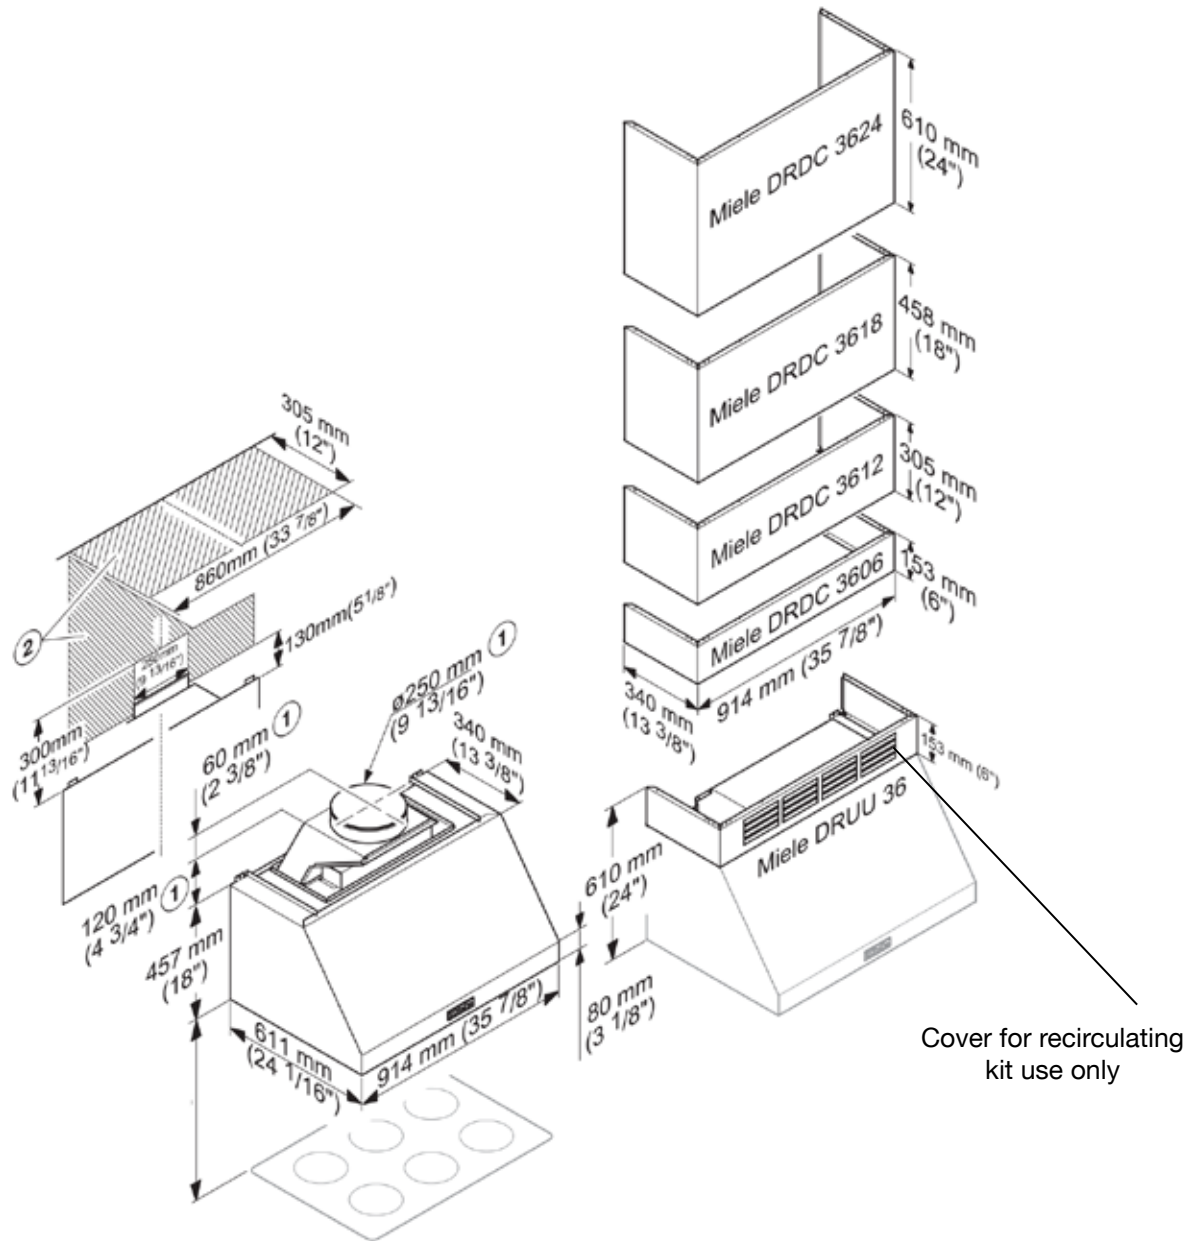

① The hood with exhaust collar is only used in vented mode with an internal or external blower.

② Installation area; Wall/ceiling area respectively for vent hole and outlet installation. For recirculation mode only the outlet installation is required.