Document # PG07-001


Revised 06/24/10 Page 1/1



30", 36", 42" and 48" Wide Wall Mount Chimney Hoods

PLANNING GUIDE

All tolerances: ±1/16" (±1.6 mm), -0, unless otherwise stated

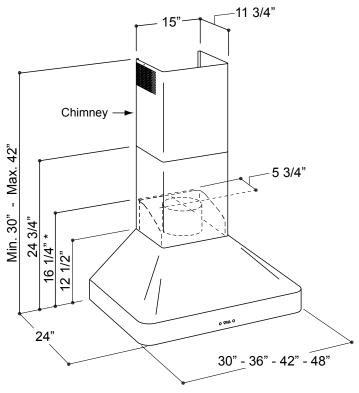

* 18" 1/4 on 48 inch model (DHW482)

DHW SERIES OVERALL DIMENSIONS

Blower	600 CFM* (1200 CFM* for units with 2 blowers) with electronic speed control		
Blower speeds	4		
Lights	12 Vac, 20 Watt halogen		
Filters	Baffle type, dishwasher safe		
Exhaust	8 inch		
Finish	430 stainless steel		
Total connected load	120 Vac, 60 Hz. (see table at right for current rating)		
Circuit requirements	120 Vac, 15 Amp. grounded, dedicated 3-wire circuit (hot, neutral, ground)		

^{*} At zero inches static pressure


GENERAL SPECIFICATIONS

MODEL NUMBER					
	DHW301	DHW361	DHW421	DHW482	
Blowers	1	1	1	2	
Lights	2	2	3	4	
Filters	1	1	1	2	
Maximum current draw	3.4 Amp.	3.4 Amp.	3.6 Amp.	6.8 Amp.	

MODEL SPECIFIC SPECIFICATIONS

⚠ WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information
- This appliance must be installed in accordance with the accompanying installation instructions.
- DO NOT install an additional in-line or external blower to increase the length of the duct run. Even small differences between blower air flow rates can greatly reduce the air draw of the hood.
- Chimney can accommodate up to 10" round duct work
- Unit can be installed to exhaust through the ceiling or through the rear wall (see diagram below).



REAR EXHAUST DIAGRAM

IMPORTANT: The minimum installed distance from the hood to the cooking surface <u>must</u> be no less than 30 inches. The minimum specified distance may be higher for the particular range or cooktop in use. Check the manufacturers specifications for the cooktop or range.

Maximum Duct Length

The maximum <u>straight</u> duct length for the hood is 50 feet. To determine the <u>actual</u> maximum duct run, subtract the equivalent length of each elbow, transition and cap from 50 feet. See the **Duct Planning Guide** or the installation instructions for more details.

Phone: (800) 793-0093