MODEL DBI675PHXXLS



FEATURES

Pro handle and hidden controls

TouchProof™ stainless steel

Turbo Drying™ drying system

17 place-setting capacity

Quiet operation - 40 dB(A)

9Spray[™] wash system; separate spray nozzles clean pots & pans and continuously spray the cutlery basket

11 wash programs

Delayed start - up to 24 hours

LED lit interior

Heavy-duty stainless steel construction with nylon-coated steel racks

Status light



a ASKO

INTERIOR FEATURES

- Exclusive height-adjustable upper rack
- Exclusive middle rack with removable inserts
- Exclusive lower rack

PROGRAMS


- Sanitation Wash
- Normal Wash
- Eco Wash
- Rinse and Hold
- Time Program
- Plastic Wash
- Hygiene Wash
- Crystal Glass
- Self-Cleaning
- Lower Half Wash
- Upper Half Wash

PRODUCT SPECIFICATIONS


Model	DBI675PHXXLS
Width	237/8"
Height	34" - 35 ³ /4"
Depth	22"
Door Clearance	24 ⁵ /8"
Weight	115 lb
Max Loading Height Up	oper Rack 9"
Max Loading Height Lo	wer Rack 11 ¹ /2"
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Pressure	4.2–140 psi

Electrical supply, plumbing supply and drain should be located in an adjacent cabinet. If not, they must be located within the shaded area shown in the illustrations below.

ELECTRICAL | PLUMBING




DIMENSIONS

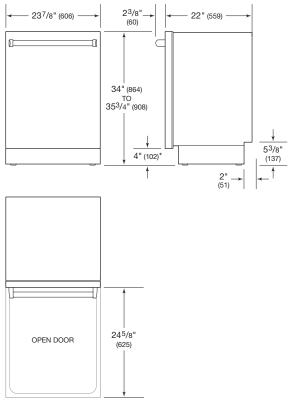

*Dimension will vary with product height.

INSTALLATION

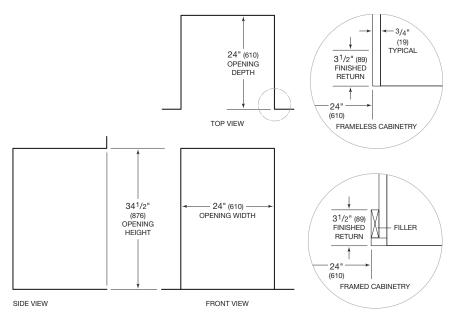

NOTE: 31/2" (89) finished returns will be visible and should be finished to match cabinetry.