

MODEL DBI675THXXLS



FEATURES

Tubular handle and hidden controls

TouchProof™ stainless steel

Turbo Drying™ system

17 place-setting capacity

Quiet operation – 40 dB(A)

 $9 \mbox{Spray}^{\mbox{\tiny TM}}$ wash system; separate spray nozzles clean pots & pans and continuously spray the cutlery basket

11 wash programs

Delayed start - up to 24 hours

LED lit interior

Heavy-duty stainless steel construction with nylon-coated steel racks

Status light



INTERIOR FEATURES

- Exclusive height-adjustable upper rack
- Exclusive middle rack with removable inserts
- Exclusive lower rack

PROGRAMS

- Sanitation Wash
- Normal Wash
- Eco Wash
- Rinse and Hold
- Time Program
- Plastic Wash
- Hygiene Wash
- Crystal Glass
- Self-Cleaning
- Lower Half Wash
- Upper Half Wash




PRODUCT SPECIFICATIONS

Model		DBI675THXXLS
Width		23 ⁷ /8"
Height		34"- 35 ³ /4"
Depth		22"
Door Clearance		24 ⁵ /8"
Weight		115 lb
Max Loading Height Upper Rack		9"
Max Loading Height Lower Rack		11 ¹ /2"
Electrical Supply		115 VAC, 60 Hz
Electrical Service		15 amp circuit
Plumbing Supply	1/4" OD coppe	er, braided stainless steel or PEX tubing
Pressure		4.2-140 psi


Electrical supply, plumbing supply and drain should be located in an adjacent cabinet. If not, they must be located within the shaded area shown in the illustrations below.

ELECTRICAL | PLUMBING






DIMENSIONS

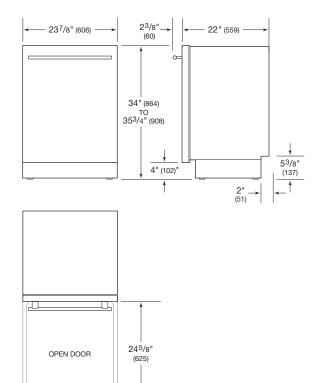

*Dimension will vary with product height.

INSTALLATION

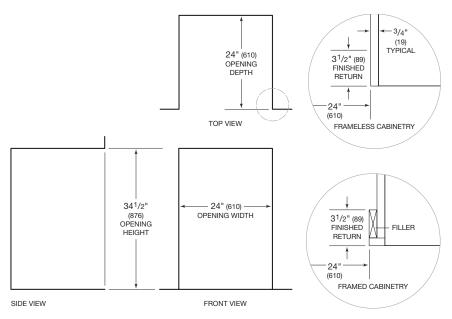

NOTE: 31/2" (89) finished returns will be visible and should be finished to match cabinetry.