
Míele









*mieleusa.com Specification Sheets TRS 02212017





DGC 6760 XXL Features:


- Class leading capacity with 41% more space than XL (with 4 shelf levels)
- M Touch innovative and revolutionary controls are both easy-to-operate and navigate
- MultiSteam technology delivers powerful external steam generation and optimum steam distribution via 6 inlet ports
- Wired roast probe for perfect roasting
- 3-in-1 appliance
 - 1. True European convection oven
 - 2. Steam oven
 - 3. Combination of steam and convection oven
- MasterChef and MasterChef Gourmet menus offer over 100 food types to cook to perfection
- Lift up control panel conceals water and condensate container (both containers are dishwasher safe)
- Clean Glass door for easy clean-up

SPECIFICATIONS	
DGC 6760 XXL — Item 23676053USA	
Overall Fascia Dimensions	$23^{7}/_{16}$ " (595 mm) W x $23^{7}/_{16}$ " (595 mm) H x $^{7}/_{8}$ " (23 mm) D
Overall Unit Width - Excluding Fascia Dimension	21 ⁹ / ₁₆ " (548 mm)
Overall Unit Height - Excluding Fascia Dimension	23 ¹ / ₄ " (590 mm)
Overall Unit Depth - Excluding Fascia Dimension	22 ³ / ₈ " (567 mm)
Built-In	
Minimum Cabinet Width	22 ¹ / ₁₆ " (560 mm)
Minimum Cabinet Depth	22 ¹ / ₂ " (572 mm)
Minimum Opening Height	23 ³ / ₈ " (593 mm)
Additional Cut-Outs Required	Venting cut-out required 19 ¹¹ / ₁₆ " x 1 ⁹ / ₁₆ " (500 mm x 40 mm)
Electrical	
Electrical Requirements	208/240V, 60Hz, 20A
Power Cord	Molded plug - NEMA 6-20 power cord 6' 6 ³ / ₄ " (2 m)
Shipping	
Shipping Weight	135 lbs (61 kg)
Shipping Dimensions	28 ⁷ / ₈ " W x 28 ³ / ₈ " H x 26 ⁵ / ₈ " L
Support	
Call Miele	800.843.7231
Miele Website	⁴www.mieleusa.com
20/20 Link	⁴2020technologies.com



PRODUCT SPECIFICATIONS


Isometric View

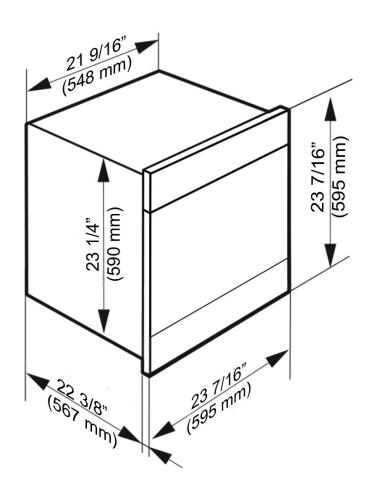



INSTALLATION SPECIFICATIONS


Door Swing Detail



* Glass front / ** Metal front

Lift Panel Side View

The area in front of the control panel must not be blocked by anything (such as a door handle) that would hinder it from opening and closing.







INSTALLATION SPECIFICATIONS

Tall Cabinet Installation

- 1 Steam oven
- 2 Niche
- 3 Pass-through for the power cord
- 4 Recommended position for electrical outlet
- 5 Power cord, L = 78 3/4" (2,000 mm)
- * Glass front / ** Metal front

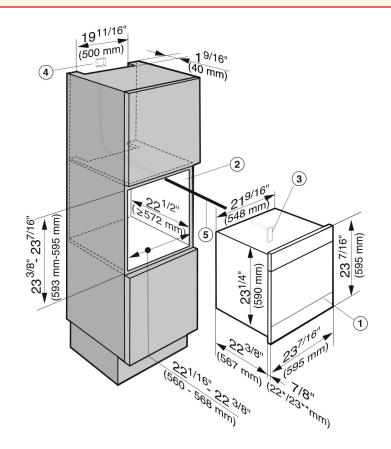

Tall Cabinet Installation — Venting and/or Plumbing Requirements

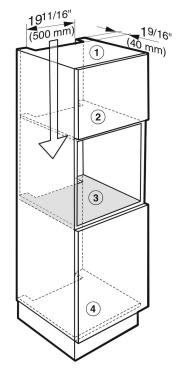


- 1) Cut-out in top of unit (ventilation)
- 2 Cut-out in the interim shelf above the building-in niche (for ventilation)
- 3 Cut-out in the interim shelf below the building-in niche (plumbing)
- 4 Cut-out in unit floor (plumbing)



INSTALLATION SPECIFICATIONS


Undercounter Installation

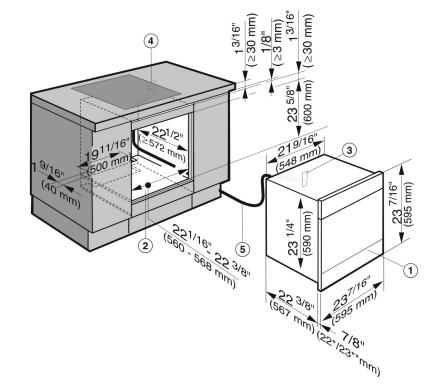

- 1) Steam oven
- Niche
- ③ Pass-through for the power cord
- 4 Recommended position for electrical outlet
- 5 Power cord, L = 78 3/4" (2,000 mm)
- * Glass front / ** Metal front

When building the appliance into a base unit underneath a cooktop, please also observe the installation instructions for the cooktop and its respective installation depth (see the installation instructions for the cooktop).

Undercounter Installation — Venting Requirements



To ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring 19 11/16" x 1 9/16" (500 x 40 mm) must be made:

①in the appliace suppot base


②in the bottom of the cabinet space below

The cabinet housing must not have a back panel fitted behind the installation niche.




HANDLE DETAILS

All Miele Signature And PureLine Handle Dimensions



Please note hinges may require adjusting or replacing when changing from a ContourLine Handle to a PureLine or Miele Signature Handle.

All ContourLine Handle Dimensions



Please note hinges may require adjusting or replacing when changing from a PureLine or Miele Signature Handle to a ContourLine Handle.