


# COLONNE ISLAND IPP9E SERIES RANGE HOOD



The traditional island chimney hood design from Italy has stood the test of time. The Colonne Island builds on this legacy with a new powerful design that looks spectacular from any angle, and at the same time, handles the needs of pro-style cooking.

### FEATURES


- Italian design
- Wall mount
- Finishes: 430 Stainless Steel, #4 Brushed
- Width: 42-in. Depth: 30"
- Telescopic flue accommodates 8' to 9' ceilings
- 10" round duct connector/backdraft damper
- 2-level halogen lamps, T4, G9, 25-Watt, Qty:4
- Three speed plus boost, electronic pushbuttons with display
- Use with exterior-mounted or inline remote blowers for different levels of exhaust capacity (see specifications - blower purchased separately)
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected
- Delay timer control automatically shuts off range hood after 10 minutes
- Special control indicates when it's time to clean the filter
- Dishwasher-safe filter features a quick-release latch
- For indoor use only

### OPTIONS

- Flue extension for 10-ft. to 11-ft. ceilings (Model AEIPP9SB, stainless steel)
- Make-up air damper (MD6TU, MD8TU, MD10TU)
- Remote control (ACR2)

### SPECIFICATIONS

WITH OPTIONAL BLOWER MODELS		BLOWER CFM	VOLTS	AMPS	DUCT
EB6	wall or roof mount exterior blowers	600 max.	120	0.84 (lights only) + 6.0 max. (blower only)	10-in. round at the hood.
EB9		900 max.			
EB12		1200 max.			
EB15		1500 max.			
ILB3	inline blowers	280 max.			See blower specs for duct requirements.
ILB6		600 max.			
ILB9		800 max.			
ILB11		1100 max.			

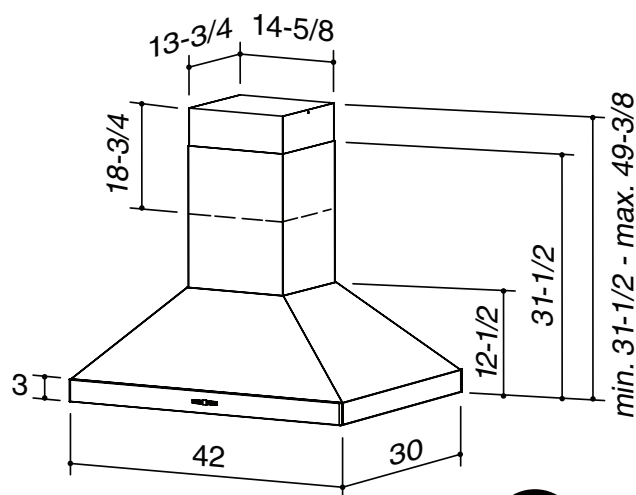


BEST Hartford, Wisconsin [www.BestRangeHoods.com](http://www.BestRangeHoods.com) 800-558-1711  
BEST Drummondville, QC, Canada [www.BestRangeHoods.com](http://www.BestRangeHoods.com) 866-737-7770


REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date

IPP9E SERIES WIRING


BLOWER CONNECTION AT HOOD

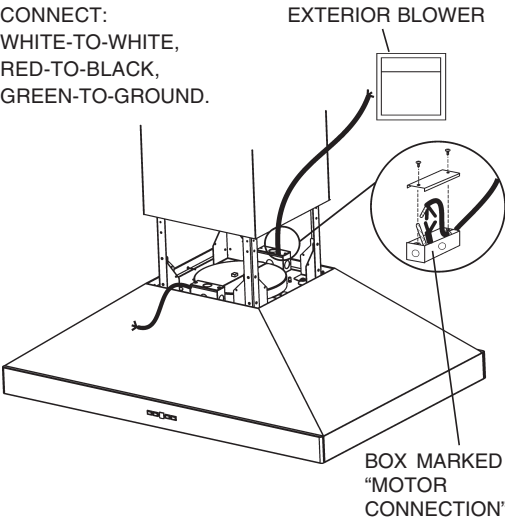

IPP9E SERIES MOUNTING

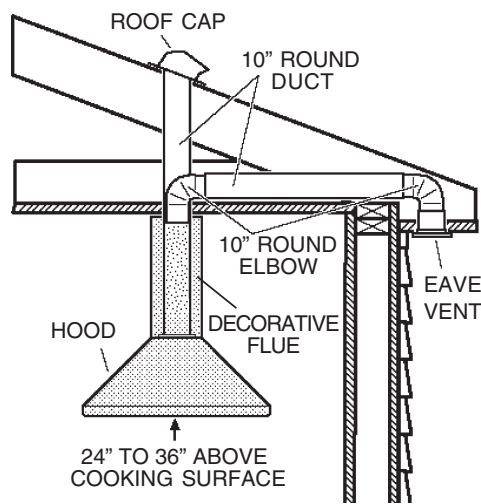

LOCATION FOR INCOMING POWER TO HOOD.  
PROVIDE 36-IN. OF WIRE FOR 8-FT. TO 9-FT. CEILINGS  
AND 60-IN. OF WIRE FOR 10-FT. TO 11-FT. CEILINGS.

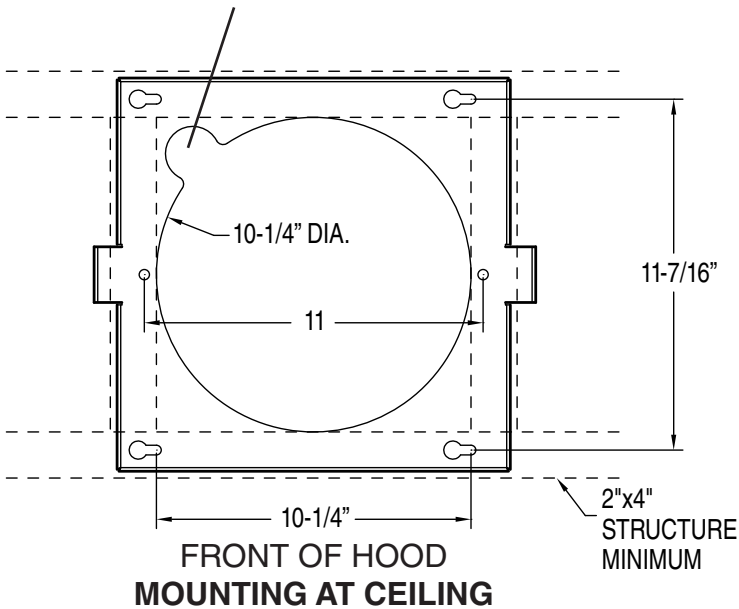

CEILING HEIGHT	HOOD DISTANCE ABOVE 36" HIGH COOK TOP (see notes below)												
	24"	25"	26"	27"	28"	29"	30"	31"	32"	33"	34"	35"	36"
ASSEMBLED SUPPORT FRAME HEIGHT (IN.)													
8 FEET	24¾"	23¾"	22¾"	21¾"	---	---	---	---	---	---	---	---	---
9 FEET	---	---	---	33¾"	32¾"	31¾"	30¾"	29¾"	28¾"	27¾"	26¾"	25¾"	24¾"
10 FEET (see note b.)	48¾"	47¾"	46¾"	45¾"	44¾"	43¾"	42¾"	41¾"	40¾"	39¾"	38¾"	---	---
11 FEET (see note b.)	---	---	---	---	56¾"	55¾"	54¾"	53¾"	52¾"	51¾"	50¾"	49¾"	48¾"

- Mounting height is not possible.
- a. Minimum hood distance above cook top must not be less than 24". A maximum of 36" above cook top is highly recommended for best capture of cooking impurities. Distances over 36" are at the installer and user's discretion; and if ceiling height and flue length permit.
  - b. Requires optional 10-ft. to 11-ft. flue extension, ducted model AEIPP9SB.

