



INNOVATION

- Exclusive, patented Star® Burner most even heating, unsurpassed flame coverage
- QuickClean Base[™] designed for easy surface cleaning
- Precision simmering capabilities as low as 100°F (375 BTU) with 2 ExtraLow® Simmer burners

PERFORMANCE

- Professional style, continuous cast iron grates
- Continuous porcelain, easy to clean cooking surface
- Every burner 15,000 BTU (LP)
- Widest range of simmer options from 375 BTU to 3,000 BTU
- Star® design delivers superior heat spread for any size pan
- Simmer without stirring/scorching with exclusive ExtraLow®
- Superior griddle results-6 pass, 1630 watt electric griddle
- Titanium surface non-stick, rust-proof castaluminum griddle
- Grill accessory-thermostatically controlled for even heating
- Titanium surface non-stick, rust-proof castaluminum grill accessory
- Removable griddle and grill accessory for easy clean-up
- Powerful, 22,000 BTU bake and 19,000 BTU broil burners
- Convection Bake offers precise multi-level baking results
- Massive oven capacity of 4.4 cu.ft. plus 2.2 cu.ft. in small oven
- Six rack levels for multiple item cooking
- Full Access® telescopic racks, integrated easy-grip




handle

- Electronic oven control ensures precise heating
- Large oven door window for maximum viewing
- Powerful halogen lighting illuminates the oven cavity
- Sabbath mode

DESIGN

- Bold Professional design
- Truly Flush Mounted™, 24" standard cabinet depth
- Patented Pedestal Star® Burner with QuickClean Base™
- Restaurant style metal knobs
- Signature blue indicator lighting
- 48" units ship standard with island trim included



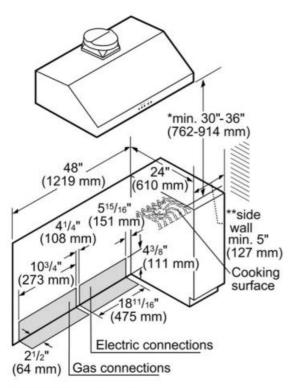


- * 30" (762 mm) minimum clearance above cooking surface to non-combustible surface. Minimum clearance above cooking surface to combustible surface is 36" (914 mm).
- ** 5" (127 mm) minimum clearance from sides of the cooker, above the cooking surface, to combustible side walls.

Note: Most hoods contain combustible components that must be considered when planning the installation.

measurements in inches

| 20 |
|----------------------------------------------------------------------------------------------------------------------------------|
| 60 |
| Liquid gas 27,5 mbar (USA) |
| CSA |
| 120V-3 prong |
| 509 |
| 565 |
| Cast iron |
| 3 |
| Full metal |
| 1 x island trim, 1 x Broiler pan small, 1 x Broiler pan |
| 1630 |
| PA12CHPBLK, PA12GRILHC, PA18GTRH, PA30GTRH, PA48GHSH PA48GLBH, PAGRIDDLE, PAKNOBLK, PAKNOBLU, PC24CHPBLK, PWOKRINGHC |
| front left |
| 17000 |
| 4.98 |
| back left |
| 17000 |
| 4.98 |
| back right |
| 17000 |
| 4.98 |
| front right |
| 17000 |
| 4.98 |
| |
| |





measurement in inches