T24IW901SP 24-INCH BUILT-IN WINE PRESERVATION COLUMN FREEDOM® COLLECTION, PANEL-READY





FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Three Independent Temperature Zones for your complete collection
- Luxuries smooth cantilever shelves for your true wine reserve needs
- Smooth Filtered Lighting for clear and easy viewing of all product
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

Home Connect™ (Wi-Fi Enabled)	Yes
Panel Ready	Yes
Reversible Door Swing	Yes
Lighting	Multiple Filtered Settings
Number of Shelves	11
Shelf Material	Wenge Wood / Aluminum Frame
Full Extension Drawers @ 115° Door Opening Angle	Yes
Full Extension Drawers @ 90° Door Opening Angle	Yes
Presenter Shelf	Yes
Portable Aluminum Wine Presenter	Yes
Type of Glass Door	Tempered and UV-protective
Number of Temperature Zones	3
Door Open Alarms	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation
CAPACITY	
Bottle Capacity (750 ml)	92
TEMPERATURE RANGES	92
	92 41°F (5°C) to 68°F (18°C)
TEMPERATURE RANGES	41°F (5°C) to 68°F
TEMPERATURE RANGES Zone 1 (Upper Zone)	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F
TEMPERATURE RANGES Zone 1 (Upper Zone) Zone 2 (Middle Zone)	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F
TEMPERATURE RANGES Zone 1 (Upper Zone) Zone 2 (Middle Zone) Zone 3 (Lower Zone)	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F
TEMPERATURE RANGES Zone 1 (Upper Zone) Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C)
TEMPERATURE RANGES Zone 1 (Upper Zone) Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W)	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 350 W
TEMPERATURE RANGES Zone 1 (Upper Zone) Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W) Current (A)	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 350 W 15 A
TEMPERATURE RANGES Zone 1 (Upper Zone) Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W) Current (A) Volts (V)	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 350 W 15 A 120V-3 Prong
TEMPERATURE RANGESZone 1 (Upper Zone)Zone 2 (Middle Zone)Zone 3 (Lower Zone)TECHNICAL DETAILSWatts (W)Current (A)Volts (V)Frequency (Hz)	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 350 W 15 A 120V-3 Prong 60 Hz
TEMPERATURE RANGESZone 1 (Upper Zone)Zone 2 (Middle Zone)Zone 3 (Lower Zone)TECHNICAL DETAILSWatts (W)Current (A)Volts (V)Frequency (Hz)Power Cord Length (in.)	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 350 W 15 A 120V-3 Prong 60 Hz 118
TEMPERATURE RANGESZone 1 (Upper Zone)Zone 2 (Middle Zone)Zone 3 (Lower Zone)TECHNICAL DETAILSWatts (W)Current (A)Volts (V)Frequency (Hz)Power Cord Length (in.)Plug Type	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 350 W 15 A 120V-3 Prong 60 Hz 118
TEMPERATURE RANGESZone 1 (Upper Zone)Zone 2 (Middle Zone)Zone 3 (Lower Zone)TECHNICAL DETAILSWatts (W)Current (A)Volts (V)Frequency (Hz)Power Cord Length (in.)Plug TypeDIMENSIONS & WEIGHT	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 350 W 15 A 120V-3 Prong 60 Hz 118 120V-3 Prong
TEMPERATURE RANGESZone 1 (Upper Zone)Zone 2 (Middle Zone)Zone 3 (Lower Zone)TECHNICAL DETAILSWatts (W)Current (A)Volts (V)Frequency (Hz)Power Cord Length (in.)Plug TypeDIMENSIONS & WEIGHTAppliance Dimensions (H x W x D) (in.)	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 350 W 15 A 120V-3 Prong 60 Hz 118 120V-3 Prong 83 3/4"* x 23 3/4" x 24"
TEMPERATURE RANGESZone 1 (Upper Zone)Zone 2 (Middle Zone)Zone 3 (Lower Zone)TECHNICAL DETAILSWatts (W)Current (A)Volts (V)Frequency (Hz)Power Cord Length (in.)Plug TypeDIMENSIONS & WEIGHTAppliance Dimensions (H x W x D) (in.)Required Cutout Size (H x W x D) (in.)	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 350 W 15 A 120V-3 Prong 60 Hz 118 120V-3 Prong 83 3/4"* x 23 3/4" x 24" 84" x 24" x 25"
TEMPERATURE RANGESZone 1 (Upper Zone)Zone 2 (Middle Zone)Zone 3 (Lower Zone)TECHNICAL DETAILSWatts (W)Current (A)Volts (V)Frequency (Hz)Power Cord Length (in.)Plug TypeDIMENSIONS & WEIGHTAppliance Dimensions (H x W x D) (in.)Required Cutout Size (H x W x D) (in.)Net / Gross Weight (lbs)	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 350 W 15 A 120V-3 Prong 60 Hz 118 120V-3 Prong 83 3/4"* x 23 3/4" x 24" 84" x 24" x 25"
TEMPERATURE RANGESZone 1 (Upper Zone)Zone 2 (Middle Zone)Zone 3 (Lower Zone)TECHNICAL DETAILSWatts (W)Current (A)Volts (V)Frequency (Hz)Power Cord Length (in.)Plug TypeDIMENSIONS & WEIGHTAppliance Dimensions (H x W x D) (in.)Required Cutout Size (H x W x D) (in.)Net / Gross Weight (lbs)EFFICIENCY	41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 41°F (5°C) to 68°F (18°C) 350 W 15 A 120V-3 Prong 60 Hz 118 120V-3 Prong 83 ³ /4"* x 23 ³ /4" x 24" 84" x 24" x 25" 328 / 350 lbs

*Height adjustable + / -1/2" (+ / -13 mm)


T24IW901SP 24-INCH BUILT-IN WINE PRESERVATION COLUMN FREEDOM® COLLECTION, PANEL-READY



WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System**; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System**; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

**Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing


CUTOUT DIMENSIONS

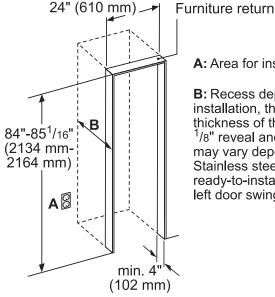

A: Area for installation of power connection.


B: Recess depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel. Panel dimensions based on a standard ¹/8" reveal and 4 inch toe kick. Custom panel dimensions may vary depending on kitchen reveals and toe kick. Stainless steel models contain a panel-ready base unit, ready-to-install stainless steel door(s) with a right or left door swing and handle(s).

TOP VIEW CLEARANCE

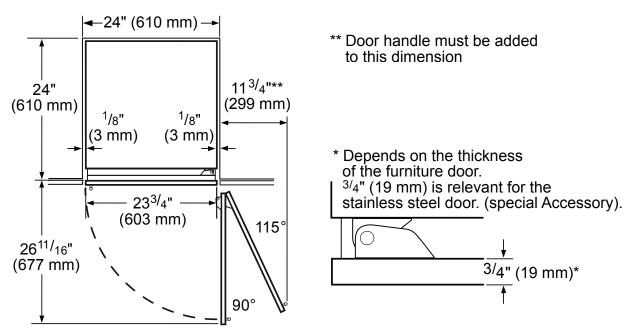

T24IW901SP 24-INCH BUILT-IN WINE PRESERVATION COLUMN FREEDOM® COLLECTION, PANEL-READY

PRODUCT AND PANEL DIMENSIONS

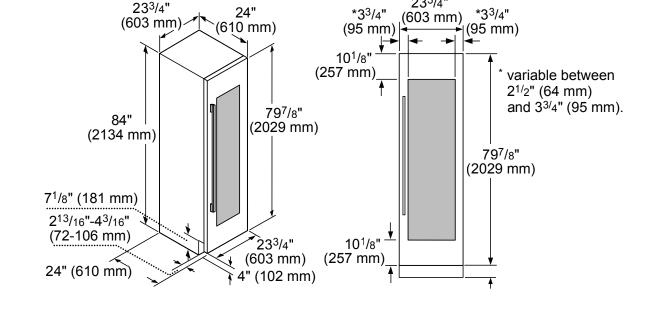

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS

TEI 24IW/800 24-Inch Flat Stainless Steel Door Panel

NOTE: Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

er Kit Rea

HANDLES

NOTE: Choose one handle for each column, choose 2 handles for each 2-door bottom freezer and choose 3 handles for each French Door bottom freezer.

PR36HNDL20 36-Inch Professional Series Handle PR30HNDL20 30-Inch Professional Series Handle

233/4"

MS36HNDL20 36-Inch Masterpiece® Series Handle MS30HNDL20 30-Inch Masterpiece® Series Handle AVAILABLE WHILE SUPPLIES LAST:

MS36HNDL10 36-Inch Masterpiece® Series Classic Handle MS30HNDL10 30-Inch Masterpiece® Series Classic Handle

HEATRKIT20 - 13W @ 120V Freedom[®] Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada Thermador is not responsible for products that are transported from the U.S. for use in Canada

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

