T30IF900SP 30-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER



FREEDOM® COLLECTION, PANEL-READY



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES	
Freezer	-9°F (-23°C) to 7°F (14°C)
SuperFreeze®	-9°F (-23°C) for approximately 52 hours
Energy Saving (Economy) Mode	3°F (-16°C)

GENERAL PROPERTIES	
Panel Ready	Yes
Reversible Door Swing	Yes
SoftClose® Drawers	Yes
Lighting	ALL LED Sidewall and
	Theater Lighting
Full Width Shelves	3
Adjustable Shelves	3
Freezer Shelves	4
Shelf Material	Glass w/Aluminum Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
General Use Drawer	2
Door Bins	4
External LED Proximity Sensor	No
Oversized Dispenser Opening	No
Chilled Water, Crushed and Cubed Ice	No
Rapid Water Replenishment System	No
Ice Maker with Diamond Ice System	Yes
Door Open Alarm	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation
CARACIEN/	
CAPACITY	
Total Unit Gross Capacity (cu. ft.) – AHAM	15.8 cu. ft.
	15.8 cu. ft.
Total Unit Gross Capacity (cu. ft.) – AHAM	
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.)	
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE	15.8 cu. ft.
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System	15.8 cu. ft.
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze®	15.8 cu. ft. Yes Yes
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process	15.8 cu. ft. Yes Yes
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS	15.8 cu. ft. Yes Yes Frost-Free
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W)	15.8 cu. ft. Yes Yes Frost-Free
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A)	15.8 cu. ft. Yes Yes Frost-Free 504 W 15 A
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V)	15.8 cu. ft. Yes Yes Frost-Free 504 W 15 A 120V-3 Prong
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz)	15.8 cu. ft. Yes Yes Frost-Free 504 W 15 A 120V-3 Prong 60 Hz
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.)	15.8 cu. ft. Yes Yes Frost-Free 504 W 15 A 120V-3 Prong 60 Hz 139
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type	15.8 cu. ft. Yes Yes Frost-Free 504 W 15 A 120V-3 Prong 60 Hz 139
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT	15.8 cu. ft. Yes Yes Frost-Free 504 W 15 A 120V-3 Prong 60 Hz 139 120V-3 Prong
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.)	15.8 cu. ft. Yes Yes Frost-Free 504 W 15 A 120V-3 Prong 60 Hz 139 120V-3 Prong 84"* x 29 3/4" x 24"
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.)	15.8 cu. ft. Yes Yes Frost-Free 504 W 15 A 120V-3 Prong 60 Hz 139 120V-3 Prong 84"* x 29 3/4" x 24" 84" x 30" x 25"
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs)	15.8 cu. ft. Yes Yes Frost-Free 504 W 15 A 120V-3 Prong 60 Hz 139 120V-3 Prong 84"* x 29 3/4" x 24" 84" x 30" x 25"
Total Unit Gross Capacity (cu. ft.) – AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs) EFFICIENCY	15.8 cu. ft. Yes Yes Frost-Free 504 W 15 A 120V-3 Prong 60 Hz 139 120V-3 Prong 84"* x 29 3/4" x 24" 84" x 30" x 25" 362 / 387 lbs

*Height adjustable + / -1/2" (+ / -13 mm)

Page 1 of 3 09 / 17

T30IF900SP

30-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER




FREEDOM® COLLECTION, PANEL-READY


WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System**; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System**; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

 $^{{\}tt **Sealed}\ refrigeration\ system\ includes\ compressor,\ evaporator,\ condenser,\ dryer\ /\ strainer\ and\ connection\ tubing$

CUTOUT DIMENSIONS

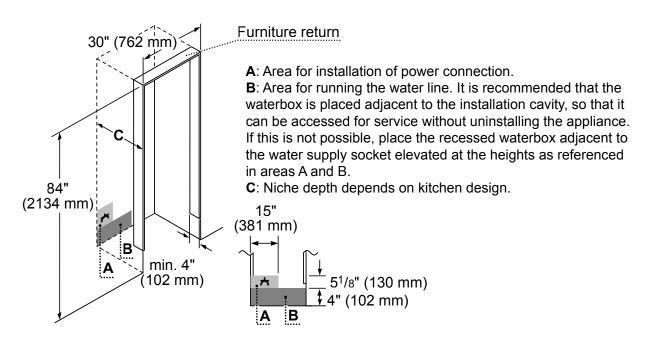


TOP VIEW CLEARANCE



** Door handle must be added to this dimension

*Depends on the thickness of the unt door.

| 3/4" (19 mm) refers to the stainless steel door. (special accessory).




Page 2 of 3 09 / 17

T30IF900SP 30-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER



FREEDOM® COLLECTION, PANEL-READY

PANEL DIMENSIONS

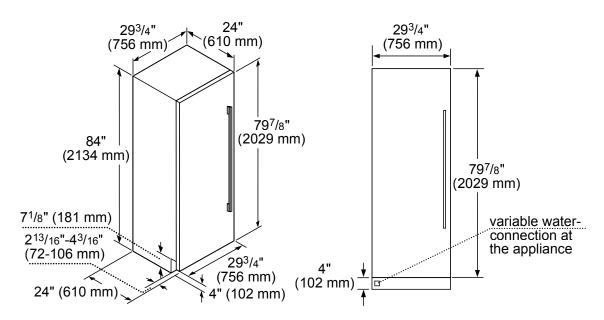

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS



TFL30IR800 30-Inch Flat Stainless Steel Door Panel Without Dispenser

STORAGE



ICEBUCKETL Large Ice Bucket

HANDLES

NOTE: Choose one handle for each column, choose 2 handles for each 2-door bottom freezer and choose 3 handles for each French Door bottom freezer.

PR36HNDL20

36-Inch Professional Series Handle PR30HNDL20

30-Inch Professional Series Handle

MS36HNDL20

36-Inch Masterpiece® Series Handle MS30HNDL20

30-Inch Masterpiece® Series Handle

PR36HNDL10

36-Inch Professional Series Classic Handle PR30HNDL10

30-Inch Professional Series Classic Handle

MS36HNDL10

36-Inch Masterpiece® Series Classic Handle MS30HNDL10

30-Inch Masterpiece® Series Classic Handle

REPLFLTR10 FREEDOM® WATER FILTER

Replacement water filter for use in all freezer and bottom freezer models

HEATRKIT10 AND HEATRKIT20 FREEDOM® HEATER KIT

For installations where two appliances are installed side-by-side or instances where any appliances are installed less than 6" apart from another but not connected. The heater kit is also recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall. HEATERKIT20 offers improved energy efficiency when compared to HEATRKIT10.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 3 of 3 09 / 17