## TEMPEST

UNDER-CABINET

A streamlined under-cabinet prostyle range hood, Tempest I combines power, efficiency and flexibility. 650-CFM or optional 1,200-CFM blower options, LumiLight LED lighting and high-airflow pro baffle filters (that are dishwasher-safe) ensure a lifetime of exceptional performance. Additional options like a wireless remote control and recirculation kits for kitchens that require ductless venting ensure all you have to think about is cooking.





INTERNAL BLOWER STANDARD				
200 - 650				
1 - 6				
400 - 1,200				
3.5 - 9				

AIRFLOW CONTROL TECHNOLOGY™*				
200 - 390	200 - 290			
1 - 4	1-3			

INTERNAL BLOWER with ACT™


\*AIRFLOW CONTROL TECHNOLOGY<sup>TM</sup> (ACT<sup>TM</sup>) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.


<sup>\*</sup>Dual blower only compatible with 36", 42" and 48" models






Includes Wireless Remote Control

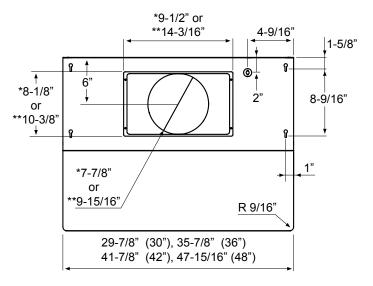



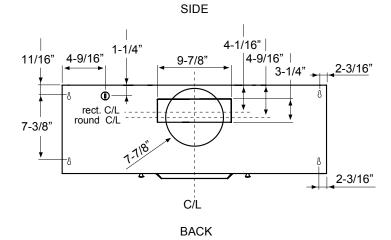

- \* Single Blower Dimension
- \*\* Dual Blower Dimension

## UNDER-CABINET



MODEL				
Stainless Steel	AK7000CS	AK7036CS	AK7042CS	AK7048CS
Size	30"	36"	42"	48"
BLOWER PERFORMANCE				
Included Single Blower	200-650 CFM	200-650 CFM	200-650 CFM	200-650 CFM
ACT 390	200-390 CFM	200-390 CFM	200-390 CFM	200-390 CFM
ACT 290	200-290 CFM	200-290 CFM	200-290 CFM	200-290 CFM
Optional Dual Blower	NA	400-1,200 CFM	400-1,200 CFM	400-1,200 CFM
FEATURES				
ACT™ Technology	Yes, Single Blower Only			
Controls	Electronic Touch	Electronic Touch	Electronic Touch	Electronic Touch
Speed Levels	6*	6*	6*	6*
Auto Delay-Off	Yes	Yes	Yes	Yes
CleanAir Function	Yes	Yes	Yes	Yes
Lighting	LumiLight LED, 6W x2			
Dual-Level Lighting	Yes	Yes	Yes	Yes
Filters	Pro Baffle x2	Pro Baffle x2	Pro Baffle x2	Pro Baffle x3
Wireless Remote Control Option	Yes, RF	Yes, RF	Yes, RF	Yes, RF
Dual Internal Blower Option	No	Yes	Yes	Yes
Recirculating Option**	Yes, Single Blower Only			
ADA Compliant	Yes (with remote accessory)			
DUCT SPECIFICATIONS				
Vertical Single Internal Blower	8" Round	8" Round	8" Round	8" Round
Horizontal Single Internal Blower	3-1/4" x 10" or 8" Round			
Vertical Dual Internal Blower	NA	10" Round	10" Round	10" Round
Horizontal Dual Internal Blower	NA	NA	NA	NA
AC POWER (Single Blower)	120V, 60Hz at Max. 5A			
AC POWER (Dual Blower)	NA	120V, 60Hz at Max. 9A	120V, 60Hz at Max. 9A	120V, 60Hz at Max. 9A
OPTIONAL ACCESSORIES				
12" Duct Cover	AK0720	AK0726	AK0722	AK0728
24" Duct Cover	AK1720	AK1726	AK1722	AK1728
Wireless Remote Control	14000005	14000005	14000005	14000005
Dual Internal Blower Kit	NA	PBD-1200A	PBD-1200A	PBD-1200A
Recirculating Kit	ZRC-7000C	ZRC-7036C	ZRC-7042C	ZRC-7048C
Telescopic Backsplash w/ Shelves	s AK0710	AK0716	AK0712	AK0718
Make-Up Air Kit (Single Blower)	MUA008A	MUA008A	MUA008A	A800AUM
Make-Up Air Kit (Dual Blower)	NA	MUA010A	MUA010A	MUA010A
MOUNTING HEIGHT RANGE***	26" - 36"	26" - 36"	26" - 36"	26" - 36"
WARRANTY	3 years parts, 1 year labor			





<sup>\*</sup>When ACT<sup>TM</sup> is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

\*\*Recirculating kit includes a return-air box which adds an additional 4" to the hood height. Recirculating kit is only compatible with single blower.

\*\*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.