HRE515 • 15" Refrigerator • 5 Class





Accessory panels are designed for easy

installation on Integrated models





Stainless Frame

•

Additional Options

Stainless Solid I

Integrated Frame Integrated Solid

Stainless Handleless Panel

Key Features

- Industry Exclusive: Full-depth lower interior maximizes storage options
- Industry Leading: Variable speed compressor delivers maximum energy efficiency, faster temperature response, and quieter operation
- Stainless steel interior
- Stainless steel cabinet, toe kick, and accents
- U-Adjust[™] Interior: 19 adjustable positions
- Three removable, full-extension Slide & Secure™ Bins
- Convection cooling system provides a quick cool down and consistent temperature
- Temperature range: 33°F 70°F

- Adjustable bright white or blue LED lighting
- Soft close door with articulating hinge
- Volume of 2.9 cu ft holds up to 47 bottles (12 oz) or 72 cans (12 oz)
- Digital touch pad control with blue LED display
- Stainless steel handle (7/8" diameter)
- Integrated model requires 3/4" custom door panel and handle (not supplied by U-Line)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Four adjustable leveling legs

MODEL DETAILS

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UHRE515-SG01A	115 / 60	Field Reversible	Stainless Frame	105 lb
UHRE515-SS01A	115 / 60	Field Reversible	Stainless Solid	92 lb
UHRE515-IG01A	115 / 60	Field Reversible	Integrated Frame	103 lb
UHRE515-IS01A	115 / 60	Field Reversible	Integrated Solid	88 lb


ACCESSORIES


Model	Description	Finish	Shipping Weight
ULAGRILLE15	Adjustable Grille (Accepts Integrated Panel)	Black	1.5 lb
ULASHP15FRAME*	Stainless Handleless Panel Frame	Stainless	5 lb
ULASHP15SOLID*	Stainless Handleless Panel Solid	Stainless	6 lb


16 *Installs on integrated models.

HRE515 • 15" Refrigerator • 5 Class

Dimensions

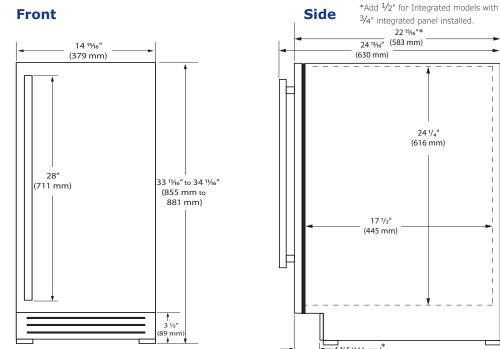



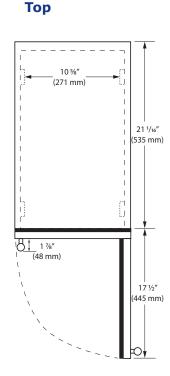


Specifications

Model	HRE515
Amps: Running	1.2
Capacity: Bottle (12 oz)	47
Capacity: Can (12 oz)	72
Capacity: Volume (cu ft)	2.9
Capacity: Wine Bottle (750 ml)	N/A
Dimensions: Product Depth	22 ¹⁵ /16" / 583 mm
Dimensions: Product Height (Min.)	33 ¹¹ / ₁₆ " / 855 mm
Dimensions: Product Width	14 ¹⁵ ⁄16″ / 379 mm
Energy Consumption: Avg. Per Year	255 - 285 kWh
ENERGY STAR (glass door)	No
ENERGY STAR (solid door)	Yes
Product Weight: Max	105 lb
Refrigerant Type:	R600a
Sabbath (Star K Certified)	Yes
Temperature Range	33°F - 70°F

Warranty


- 1 Year (parts & labor) / 5 year sealed system (parts) •
- 2 Year (parts & labor) / 5 year sealed system • (parts) upgrade at no cost with product registration

See complete warranty for details



Cabinet Cut-Out

Back



Installation Notes

plus

- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow •

