
JEP5036DT GE 36" Built-In Knob Control Electric Cooktop

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

IMPORTANT: Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.


NOTE: 36" Ribbon cooktops are approved for use over select GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/ electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered. Before installing, consult installation instructions packed with product for current dimensional data.


APPROXIMATE COOKING DIMENSIONS



To insure accuracy, it is best to make a template when cutting the opening in the counter

INSTALLATION ABOVE A WALL OVEN



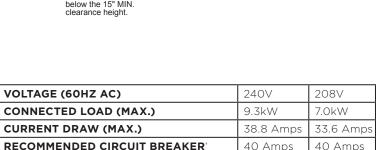

NOTE: Check local codes for required breaker size.

13" MAX. depth of unprotected

overhead cabinets





For answers to your Monogram, GE Café[™], GE Profile[™] or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center[®] Service, 800.626.2000.


1 1/2" MIN. (30") and 2" MIN. (36") Clearance from cutout to nearest vertical wall or cabinet on right side of the unit below the 15" MIN. clearance height. 36" MIN. for 36" cooktop 30" MIN. Clearance from countertop to unprotected overhead surface 15" MIN. height from countertop to nearest cabinet (including light rails) on both sides of 2" MIN. Clearance cooktop from cutout to nearest vertical wall or cabinet on left side of the unit below the 15" MIN.

JEP5036DT

GE 36" Built-In Knob Control Electric Cooktop

FEATURES AND BENEFITS

Easy Clean Surface Power Boil on Tri-Ring Element Additional Power Boil Dual-Ring Element (2,400W) Keep Warm Setting Control Lock Hot Surface Indicator Lights Fit Guarantee Flexible Cooktop Melt Setting Model JEP5036DTBB - Black on black

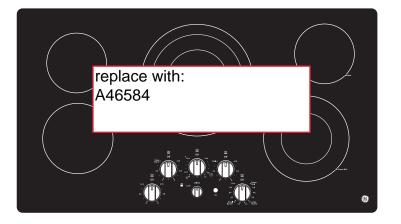

GUARANTEED FIT

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications.

Visit geappliances.com for more info.

