
# **PEP7036DT** GE Profile<sup>™</sup> 36" Built-In Touch-Control Electric Cooktop

## DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


**IMPORTANT:** Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

**NOTE:** 36" Ribbon cooktops are approved for use over select GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/ electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered. Before installing, consult installation instructions packed with product for



To insure accuracy, it is best to make a template when cutting the opening in the counter

## INSTALLATION ABOVE A WALL OVEN



VOLTAGE (60HZ AC)	240V	208V
CONNECTED LOAD (MAX.)	9.7kW	7.3kW
CURRENT DRAW (MAX.)	40.4 Amps	35.1 Amps
<b>RECOMMENDED CIRCUIT BREAKER</b> <sup>†</sup>	50 Amps	40 Amps

\*NOTE: Check local codes for required breaker size.

13" MAX. depth of unprotected

overhead cabinets





current dimensional data.

For answers to your Monogram, GE Café<sup>™</sup>, GE Profile<sup>™</sup> or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center<sup>®</sup> Service, 800.626.2000.


1 1/2" MIN. (30") and 2" MIN. (36") Clearance from cutout to nearest vertical wall or cabinet on right side of the unit below the 15" MIN. clearance height. 36" MIN. for 36" cooktop 30" MIN. Clearance from countertop to unprotected overhead surface 15" MIN. height from countertop to nearest cabinet (including light rails) on both sides of 2" MIN. Clearance cooktop from cutout to nearest vertical wall or cabinet on left side of the unit below the 15" MIN. clearance height

# PEP7036DT

GE Profile<sup>™</sup> 36" Built-In Touch-Control Electric Cooktop

## FEATURES AND BENEFITS

Power Boil on Tri- and Dual-Ring Elementst Precision Temperature Control Guided Cooking Glide Touch Controls - 11 Control Levels Easy Clean Surface Synchronized Elements Chef Connect Built-in WiFi Compatible Cooktop with Smart Cookware Keep Warm Setting Control Lock Hot Surface Indicator Lights Fit Guarantee Model PEP7036DTBB - Black on black

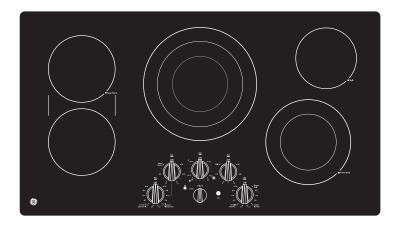

#### **\*OPTIONAL STAINLESS STEEL CLAD ALUMINUM GRIDDLE**

Achieve even results with this lightweight griddle, tailored to fit GE SyncBurners. Order part number JXGRIDL1.

#### **GUARANTEED FIT**

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications.

Visit geappliances.com for more info.

### COMPATIBLE COOKTOP WITH SMART COOKWARE

Smart pans easily pair with this smart cooktop to ensure you get the perfect cooking results. Accessories sold separately.

