PEP9036DT

GE Profile™ 36" Built-In Touch-Control Electric Cooktop


DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

IMPORTANT: Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

NOTE: 36" Ribbon cooktops are approved for use over select GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered.

Before installing, consult installation instructions packed with product for current dimensional data.


APPROXIMATE COOKING DIMENSIONS



To insure accuracy, it is best to make a template when cutting the opening in the counter

13" MAX. depth of unprotected overhead cabinets 1 1/2" MIN. (30") and 2" MIN. (36") Clearance from cutout to nearest vertical wall or cabinet on right side of the unit below the 15" MIN. clearance height. 36" MIN. for 36" cooktop 30" MIN. Clearance from countertop to unprotected overhead surface 15" MIN. height from countertop to nearest cabinet (including light rails) on both sides of 2" MIN. Clearance cooktop from cutout to nearest vertical wall or cabinet on left side of the unit below the 15" MIN. clearance height.

INSTALLATION ABOVE A WALL OVEN



VOLTAGE (60HZ AC)	240V	208V
CONNECTED LOAD (MAX.)	10.9kW	8.2kW
CURRENT DRAW (MAX.)	45.4 Amps	39.4 Amps
RECOMMENDED CIRCUIT BREAKER	50 Amps	40 Amps

*NOTE: Check local codes for required breaker size.









For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800,626,2000.

PEP9036DT

GE Profile™ 36" Built-In Touch-Control Electric Cooktop

FEATURES AND BENEFIT

Power Boil on Tri- and Dual-Ring Elements

Precision Temperature Control

Guided Cooking

Glide Touch Controls - 19 Control Levels

Easy Clean Surface

Smart Cookware Rebate for 11" Smart Pan

Built-in WiFi

Synchronized Elements

Chef Connect


Keep Warm Setting

Control Lock

Hot Surface Indicator Lights

Fit Guarantee

Model PFP9036DTBB - Black on black

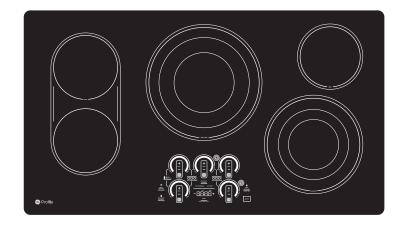

*OPTIONAL STAINLESS STEEL CLAD ALUMINUM GRIDDLE

Achieve even results with this lightweight griddle, tailored to fit GE SyncBurners. Order part number JXGRIDL1.

GUARANTEED FIT

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications.

Visit geappliances.com for more info.

SMART COOKWARE REBATE

Smart pans easily pair with this smart cooktop to ensure you get the perfect cooking results. Earn a rebate for a free 11" Hestan Cue Smart Pan.

