# HNB315 / HNP315 • 15" Nugget Ice • 3 Class






Stainless Solid



Integrated Solid



BrightShield protects against viruses, bacteria, mold, & mildew. Available on select models.

#### **Additional Options**

•

Accessory panels are designed for easy • installation on Integrated models



Panel

**U-LINE** 

### **Key Features**

Nugget Cube

- Industry Leading: BrightShield antimicrobial lighting creates a clean environment for ice \*\*select models
- Industry Exclusive: U-Choose<sup>™</sup> feature allows you to • select ice density
- Industry Exclusive: Interior water dispenser ٠
- Industry Exclusive: Single water filter for ice and water
- Industry Leading: Produces up to 90 lb of ice per day •
- Industry Leading: Stores 30 lb of ice •
- Makes cylindrical compressed ice bits approx.  $\frac{3}{4}$ " L x  $\frac{1}{2}$ " H
- Eco friendly most efficient type of specialty ice •
- Adjustable bright white or blue LED lighting (on non-BrightShield . models)
- Soft close door with articulating hinge ٠

Digital touch pad control with blue LED display

Black interior

- Indicator alert notifies user when cleaning is needed •
- Stainless steel handle (1/8" diameter) •
- Easiest nugget ice machine cleaning process in the industry
- Free cleaning kit with product registration at u-line.com •
- Integrated model requires 3/4" custom door panel and handle (not supplied by U-Line)
- Field reversible door is shipped right-hand hinged •
- Built-in or freestanding •
- Four adjustable leveling legs •
- Factory installed drain pump model recommended if a gravity . drain is not accessible

## **Model Details**

Model	Voltage/Hz	Door Swing	Pump	Finish	Shipping Weight
UHNB315-SS01A	115 / 60	Field Reversible	-	Stainless Solid	107 lb
UHNP315-SS01A	115 / 60	Field Reversible	Pump Included	Stainless Solid	112 lb
UHNP315-SS81A **BrightShield Lighting	115 / 60	Field Reversible	Pump Included	Stainless Solid	112 lb
UHNB315-IS01A	115 / 60	Field Reversible	-	Integrated Solid	102 lb
UHNP315-IS01A	115 / 60	Field Reversible	Pump Included	Integrated Solid	107 lb
UHNP315-IS81A **BrightShield Lighting	115 / 60	Field Reversible	Pump Included	Integrated Solid	107 lb
UHNP315-IS02A	230 / 50	Field Reversible	Pump Included	Integrated Solid	107 lb
Model	Description			Finish	Shipping Weight
ULALINEFILTERHEAD	In-Line Water Filter Head 3/8" NPT (Required for initial setup)			N/A	1 lb
ULALINEFILTER	In-Line Water Filter (Standard)			N/A	4.5 lb
ULALINEFILTERL	In-Line Water Filter (Large)			N/A	7 lb
ULANUGGETCLEANKIT	Includes 1 Bottle Nugget Ice Cleaner, Funnel, & Hose			N/A	1 lb
ULANUGGETCLEAN	Nugget Ice Cleaner (Single 8 oz. bottle)			N/A	1 lb
ULANUGGETFILTER	Replacement Water Filter (3 Class Nugget Ice)			N/A	2 lb
ULAWATERHOOKUP	Braided Water Supply Line Kit			N/A	2 lb
ULASHP15SOLID*	Stainless Handleless Panel Solid			Stainless	6 lb

\*Installs on integrated models.





# HNB315 / HNP315 • 15" Nugget Ice • 3 Class

#### Front

# Side

Тор

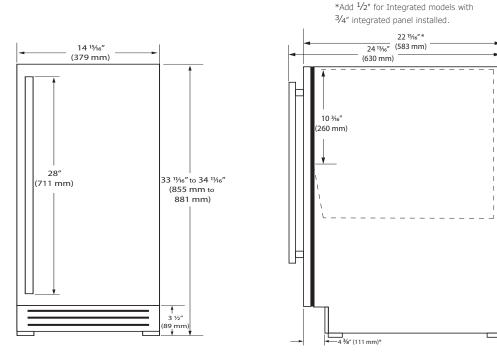

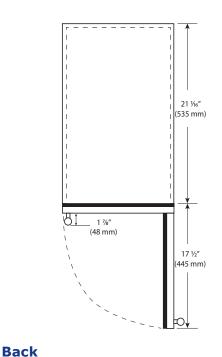

# Specifications

Model	HNB315 / HNP315	
Amps: Running	3	
Dimensions: Product Depth*	22 <sup>15</sup> /16″ / 583 mm	
Dimensions: Product Height	33 <sup>11</sup> /16″ / 855 mm	
Dimensions: Product Width	14 <sup>15</sup> / <sub>16</sub> " / 379 mm	
ENERGY STAR	Yes	
Ice Production Per Day	90 lb	
Ice Storage	30 lb	
Panel Height	30" / 762 mm	
Panel Thickness	<sup>3</sup> /4″ / 20 mm	
Panel Type	Solid Panel	
Panel Width	14 <sup>15</sup> / <sub>16</sub> " / 379 mm	
Product Weight: Max	112 lb	
Refrigerant Type:	R600a	
Sabbath (Star K Certified)	Yes	

Water Mineral Content Requirements:

TDS: Greater than 5 ppm (mg/l) but less than 400 ppm (mg/l)
Hardness: Less than 200 mg/l (12 gpg)


Not recommended for use with softened water

Visit u-line.com/waterfilters to learn about water quality solutions.


### Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details



# **Cabinet Cut-Out**



# **Installation Notes**

- 15" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow



Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.

8900 North 55th Street • Milwaukee, Wisconsin 53223 USA • +1.414.354.0300 • sales@u-line.com • u-line.com

