



Commercial Top-Load Washer

With 100 years of experience in the industry and features that streamline service, Whirlpool® Commercial Laundry machines provide performance with the quality you expect.

Featuring Factory-Installed Coin Slide and Coin Box

Commercial-Grade Features:

Choose a commercial-built product that withstands heavy traffic, regular use, and performs continuously.



Deep-Water Wash System

Provides optimal wash performance with deepwater wash and rinse cycle options and vigorous cleaning action.



Traditional Flex-Vane Agitator

Provides four distinct wash profiles—from aggressive to gentle—designed to pull clothes from the top to the bottom of the wash basket.



Galvanized, Heavy-Gauge Cabinet

Built from thick-gauge, high-quality steel, this cabinet handles high-traffic and constant use while offering top-caliber protection to the internal components.



Commercial-Grade Motor

The immensely powerful, ½-HP motor is designed to effectively deliver consistent, quality cleaning performance for any load—both the everyday and the extra-large.



Premium Bearings

The high-quality bearings minimize friction as the machine runs, and are sealed for added longevity, helping to keep the machine running smoothly with every cycle.



Full-Wrap Console

The metal console wraps completely around the back of the machine, making it easy to clean, and offering optimal protection against unexpected liquid spills or vapor.

CAE2745FQ-27" Commercial Washer

- 2.9-cu.-ft. Capacity
- 700-RPM Spin Speed
- Cycle Indicator LEDs
- Extra-Large Lid and Tub Opening
- 6" Inlet Hose and 4" Drain Hose Included

- Top-Lock and Coin Box Locks Factory-Installed, Keys Secured to Meter
- Factory Coin Slide and Coin Box Equipped
- 90-Day Labor/2-Year Limited Parts Only Warranty*

*See whirlpoolcommerciallaundry.com for complete warranty details.


Commercial Top-Load Washer




Featuring Factory-Installed Coin Slide and Coin Box

Model CAE2745FQ Motor Size—HP (kw) 1/2 (.37) Modified Energy Factor (MEF) 8.5 Water Factor (WF) 1.6 Approximate Water Usage—Gallons (Liters) 24.65 (93.3) Average total water usage per cycle 24.65 (93.3) Average hot water usage hot water cycle 6.51 (24.6) Extract Speed—Max G-Force / Max RPM 144/700 Capacity 2.9 (82) Cylinder volume—cu. ft. (liters) 2.9 (82) Cylinder diameter—in. (mm) 20.8 (528) Cylinder depth—in. (mm) 23.8 (605) Dimensions Width—in. (mm) Width—in. (mm) 27 (686) Depth—in. (mm) 44-1/2 (1,130) Lid opening—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) 29 (737) Depth—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps <th colspan="2">Washer Specifications</th>	Washer Specifications	
Modified Energy Factor (MEF) 8.5 Water Factor (WF) 1.6 Approximate Water Usage—Gallons (Liters) 24.65 (93.3) Average total water usage per cycle 0.53 (2) Average hot water usage warm water cycle 6.51 (24.6) Extract Speed—Max G-Force / Max RPM 144/700 Capacity Cylinder volume—cu. ft. (liters) 2.9 (82) Cylinder diameter—in. (mm) 20.8 (528) Cylinder depth—in. (mm) 23.8 (605) Dimensions Width—in. (mm) 27 (686) Depth—in. (mm) 26 (660) Height—in. (mm) 44-1/2 (1,130) Lid opening—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) 29 (737) Depth—in. (mm) 27.5 (699) Height—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 158 (71.7) Breaker/Fuse—amps 15 Water Inlet/Hose Operating pressure PSI (bar) 20-100 (1-8) Inlet hose length—ft. (m) 6 (1.8)	Model	CAE2745FQ
Water Factor (WF) 1.6 Approximate Water Usage—Gallons (Liters) 24.65 (93.3) Average total water usage per cycle 0.53 (2) Average hot water usage warm water cycle 6.51 (24.6) Extract Speed—Max G-Force / Max RPM 144/700 Capacity 2.9 (82) Cylinder volume—cu. ft. (liters) 2.9 (82) Cylinder diameter—in. (mm) 20.8 (528) Cylinder depth—in. (mm) 23.8 (605) Dimensions Width—in. (mm) Width—in. (mm) 26 (660) Height—in. (mm) 44-1/2 (1,130) Lid opening—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) 29 (737) Depth—in. (mm) 27.5 (699) Height—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 158 (71.7) Crated Requirements Electrical Requirements Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose 0perating pressure PSI (bar) 20–100 (1–8) Inlet hose l	Motor Size—HP (kw)	1/2 (.37)
Approximate Water Usage—Gallons (Liters) Average total water usage per cycle Average hot water usage warm water cycle Average hot water usage hot water cycle Extract Speed—Max G-Force / Max RPM 144/700 Capacity Cylinder volume—cu. ft. (liters) Cylinder diameter—in. (mm) 23.8 (605) Dimensions Width—in. (mm) 26 (660) Height—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) Electrical Requirements Electrical rating—voltage/HZ Breaker/Fuse—amps 15 Water Inlet/Hose Operatin breaker/Et. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Modified Energy Factor (MEF)	8.5
Average total water usage per cycle Average hot water usage warm water cycle Average hot water usage hot water cycle Average hot water usage hot water cycle Extract Speed—Max G-Force / Max RPM 144/700 Capacity Cylinder volume—cu. ft. (liters) 2.9 (82) Cylinder diameter—in. (mm) 23.8 (605) Dimensions Width—in. (mm) 27 (686) Depth—in. (mm) 26 (660) Height—in. (mm) Lid opening—in. (mm) 27 (737) Depth—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) Electrical rating—voltage/HZ Breaker/Fuse—amps 15 Water Inlet/Hose Operating pressure PSI (bar) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Water Factor (WF)	1.6
Average hot water usage warm water cycle Average hot water usage hot water cycle Extract Speed—Max G-Force / Max RPM 144/700 Capacity Cylinder volume—cu. ft. (liters) 2.9 (82) Cylinder diameter—in. (mm) 20.8 (528) Cylinder depth—in. (mm) 27 (686) Dimensions Width—in. (mm) 26 (660) Height—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) 29 (737) Depth—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) Electrical rating—voltage/HZ Breaker/Fuse—amps 15 Water Inlet/Hose Operating bressure PSI (bar) Drain hose length—ft. (m) 4 (1,3)	Approximate Water Usage—Gallons (Liters)	
Average hot water usage hot water cycle Extract Speed—Max G-Force / Max RPM 144/700 Capacity Cylinder volume—cu. ft. (liters) 2.9 (82) Cylinder diameter—in. (mm) 20.8 (528) Cylinder depth—in. (mm) 23.8 (605) Dimensions Width—in. (mm) 26 (660) Height—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) 29 (737) Depth—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) Electrical Requirements Electrical rating—voltage/HZ Breaker/Fuse—amps 15 Water Inlet/Hose Operating pressure PSI (bar) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) Drain hose length—ft. (m) 4 (1.3)	Average total water usage per cycle	24.65 (93.3)
Extract Speed—Max G-Force / Max RPM Capacity Cylinder volume—cu. ft. (liters) Cylinder diameter—in. (mm) 20.8 (528) Cylinder depth—in. (mm) 23.8 (605) Dimensions Width—in. (mm) 27 (686) Depth—in. (mm) 26 (660) Height—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) 29 (737) Depth—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) Electrical Requirements Electrical rating—voltage/HZ Breaker/Fuse—amps 15 Water Inlet/Hose Operating pressure PSI (bar) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Average hot water usage warm water cycle	0.53 (2)
Capacity 2.9 (82) Cylinder volume—cu. ft. (liters) 2.9 (82) Cylinder diameter—in. (mm) 20.8 (528) Cylinder depth—in. (mm) 23.8 (605) Dimensions Width—in. (mm) Width—in. (mm) 27 (686) Depth—in. (mm) 44-1/2 (1,130) Lid opening—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) Width—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical Requirements Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose Operating pressure PSI (bar) 20—100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Average hot water usage hot water cycle	6.51 (24.6)
Cylinder volume—cu. ft. (liters) 2.9 (82) Cylinder diameter—in. (mm) 20.8 (528) Cylinder depth—in. (mm) 23.8 (605) Dimensions Dimensions Width—in. (mm) 27 (686) Depth—in. (mm) 26 (660) Height—in. (mm) 44-1/2 (1,130) Lid opening—in. (mm) 17 (432) Crated Dimensions Vidth—in. (mm) Width—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight Video (1,255) Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical Requirements Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose Operating pressure PSI (bar) 20-100 (1-8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Extract Speed – Max G-Force / Max RPM	144/700
Cylinder diameter—in. (mm) 20.8 (528) Cylinder depth—in. (mm) 23.8 (605) Dimensions Width—in. (mm) 27 (686) Depth—in. (mm) 44-1/2 (1,130) Lid opening—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) 29 (737) Depth—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical Requirements Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Capacity	
Cylinder depth—in. (mm) 23.8 (605) Dimensions 27 (686) Width—in. (mm) 26 (660) Height—in. (mm) 44-1/2 (1,130) Lid opening—in. (mm) 17 (432) Crated Dimensions Vidth—in. (mm) Width—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical Requirements 15 Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Cylinder volume—cu. ft. (liters)	2.9 (82)
Dimensions 27 (686) Width—in. (mm) 26 (660) Height—in. (mm) 44-1/2 (1,130) Lid opening—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) 29 (737) Depth—in. (mm) 27.5 (699) Height—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical Requirements Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose 20–100 (1–8) Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Cylinder diameter—in. (mm)	20.8 (528)
Width-in. (mm) 27 (686) Depth-in. (mm) 26 (660) Height-in. (mm) 44-1/2 (1,130) Lid opening-in. (mm) 17 (432) Crated Dimensions Vidth-in. (mm) Width-in. (mm) 29 (737) Depth-in. (mm) 49 (1,255) Approximate Weight Uncrated-lbs. (kg) Uncrated-lbs. (kg) 158 (71.7) Crated-lbs. (kg) 176 (81.2) Electrical Requirements 15 Electrical rating-voltage/HZ 120/60 Breaker/Fuse-amps 15 Water Inlet/Hose Operating pressure PSI (bar) 20-100 (1-8) Inlet hose length-ft. (m) 6 (1.8) Drain hose length-ft. (m) 4 (1.3)	Cylinder depth—in. (mm)	23.8 (605)
Depth—in. (mm) 26 (660) Height—in. (mm) 44-1/2 (1,130) Lid opening—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) Width—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical Requirements Electrical rating—voltage/HZ Breaker/Fuse—amps 15 Water Inlet/Hose 20–100 (1–8) Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Dimensions	
Height—in. (mm) 44-1/2 (1,130) Lid opening—in. (mm) 17 (432) Crated Dimensions Width—in. (mm) Width—in. (mm) 29 (737) Depth—in. (mm) 49 (1,255) Approximate Weight 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical Requirements 15 Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Width—in. (mm)	27 (686)
Lid opening—in. (mm) 17 (432) Crated Dimensions 29 (737) Width—in. (mm) 27.5 (699) Height—in. (mm) 49 (1,255) Approximate Weight 158 (71.7) Uncrated—lbs. (kg) 176 (81.2) Electrical Requirements 15 Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Depth—in. (mm)	26 (660)
Crated Dimensions 29 (737) Width—in. (mm) 27.5 (699) Height—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical Requirements Electrical rating—voltage/HZ Breaker/Fuse—amps 15 Water Inlet/Hose 20–100 (1–8) Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Height—in. (mm)	44-1/2 (1,130)
Width—in. (mm) 29 (737) Depth—in. (mm) 27.5 (699) Height—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical Requirements Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Lid opening—in. (mm)	17 (432)
Depth—in. (mm) 27.5 (699) Height—in. (mm) 49 (1,255) Approximate Weight Uncrated—lbs. (kg) Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical Requirements Electrical rating—voltage/HZ Breaker/Fuse—amps 15 Water Inlet/Hose 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Crated Dimensions	
Height—in. (mm)	Width—in. (mm)	29 (737)
Approximate Weight 158 (71.7) Uncrated—lbs. (kg) 176 (81.2) Electrical Requirements 120/60 Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose 20–100 (1–8) Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Depth—in. (mm)	27.5 (699)
Uncrated—lbs. (kg) 158 (71.7) Crated—lbs. (kg) 176 (81.2) Electrical Requirements Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Height—in. (mm)	49 (1,255)
Crated—lbs. (kg) 176 (81.2) Electrical Requirements 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose 20–100 (1–8) Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Approximate Weight	
Electrical Requirements 120/60 Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose 20–100 (1–8) Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Uncrated—lbs. (kg)	158 (71.7)
Electrical rating—voltage/HZ 120/60 Breaker/Fuse—amps 15 Water Inlet/Hose 20–100 (1–8) Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Crated—lbs. (kg)	176 (81.2)
Breaker/Fuse – amps 15 Water Inlet/Hose 20–100 (1–8) Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Electrical Requirements	
Water Inlet/Hose 20–100 (1–8) Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Electrical rating-voltage/HZ	120/60
Operating pressure PSI (bar) 20–100 (1–8) Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Breaker/Fuse — amps	15
Inlet hose length—ft. (m) 6 (1.8) Drain hose length—ft. (m) 4 (1.3)	Water Inlet/Hose	
Drain hose length—ft. (m) 4 (1.3)	Operating pressure PSI (bar)	20–100 (1–8)
	Inlet hose length—ft. (m)	6 (1.8)
Warranty 2-Year Limited	Drain hose length—ft. (m)	4 (1.3)
	Warranty	2-Year Limited

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

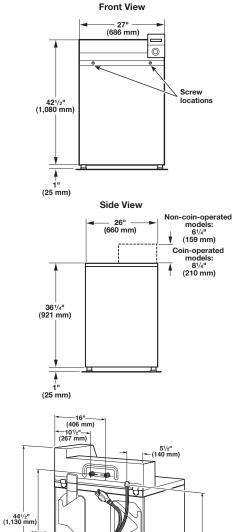







2-YEAR LIMITED PARTS ONLY WARRANTY

For the first three years from the date of purchase, when this major appliance is installed, maintained and operated according to the instructions attached to or furnished with the product, Whirlpool will pay for factory-specified replacement parts to correct defects in materials or workmanship that existed when this commercial appliance was purchased.

36^{3/4}" (933 mm)