

## QUICK REFERENCE GUIDE

HC36PHTX1

# 36" WALL CHIMNEY PYRAMID RANGEHOOD



This wall chimney pyramid vent hood has four speeds and quietly and effectively removes steam, smoke and smells from your kitchen. Soft-touch controls and easy to read settings make this simple to use. Bright halogen lighting ensures the entire cook surface is illuminated.



### A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W [fisherpaykel.com](http://fisherpaykel.com)

## FEATURES & BENEFITS

<b>Sized to Suit</b>	Designed to fit easily in your kitchen, you can select the right sized vent hood for your range or cooktop. Available in 36" width, this vent hood suits large families and kitchens.
<b>Effective and Quiet</b>	Odors can linger in the kitchen well after cooking is finished. Four fan speeds with up to 600CFM air movement ensure steam and smells are quickly removed.
<b>Designed to Match</b>	This vent hood is designed for durability and finished in stainless steel with a smooth, streamlined aesthetic that matches the rest of Fisher & Paykel's family of appliances.
<b>Easy Cleaning</b>	An interior, wipeable plate makes cleaning effortless and multi-layered filters trap grease effectively. Designed for simple removal, the filters are easy to clean and dishwasher safe.


<b>SKU Code</b>	50027
<b>UPC Code</b>	822843500277

## SPECIFICATIONS


<b>Finish</b>	Stainless steel
<b>Dimensions</b>	H(25 13/16" - 43 1/16") x W35 6/16" x D19 11/16"
<b>Fan ratings</b>	
Max. air movement	600CFM
Max. decibel rating	67dBA
<b>Performance</b>	
Extraction type	Surface
Fan speeds	4
<b>Cleaning</b>	
Dishwasher safe aluminium mesh filters	3
Stainless steel filter cover	●
<b>Installation</b>	
Two-piece height adjustable flue	●
Air outlet	6"
Ducted — top extraction	●
Recirculation — top extraction	●
<b>Controls</b>	
Control type	Soft-touch
Timer function	●
Light type	Halogen 2 x 50W
Supply voltage	120V
<b>Accessories</b>	
Ducting solution	●
Recirculation diverter	●
Recirculation carbon filter	●
<b>Manufacturer's warranty</b>	2 years

For full specifications visit [fisherpaykel.com](http://fisherpaykel.com)

**Fisher & Paykel**

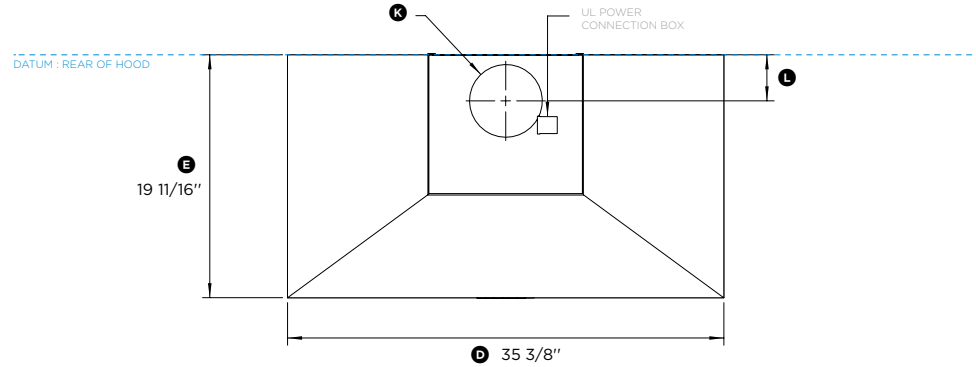

PLAN VIEW

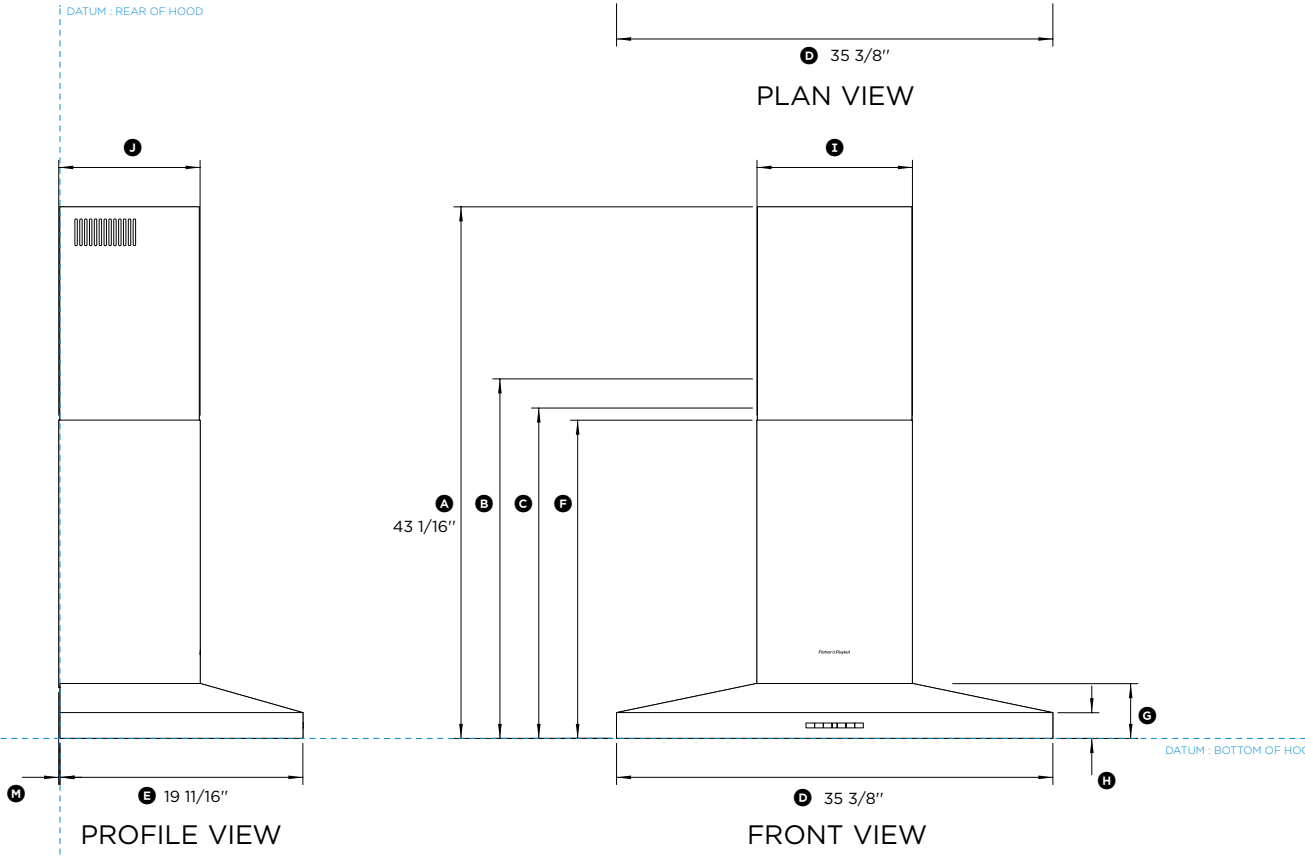

FRONT VIEW

Model no:

HC36PHTX1

Product Dimensions	in
Ⓐ Maximum height of rangehood	43 1/16"
Ⓑ Minimum overall height - recirculating	29 1/8"
Ⓒ Minimum overall height - ducted	26 3/4"
Ⓓ Overall width of rangehood	35 3/8"
Ⓔ Depth of rangehood chassis	19 11/16"
Ⓕ Height from bottom datum to top of lower chimney section	25 13/16"
Ⓖ Height of canopy	4 1/2"
Ⓗ Height of control panel	2 1/16"
Ⓘ Width of chimney	12 5/8"
Ⓚ Depth of chimney including rear bracket	11 7/16"
Ⓛ Ducting outlet diameter	6"
Ⓜ Distance from center of ducting outlet to rear datum	3 3/4"
Ⓝ Rear bracket depth	1/8"

INDICATES PRODUCT DATUM


DATE: 12.01.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

Model no:

HC36PHTX1

Product Dimensions	in
Ⓐ Overall width of rangehood	35 3/8"
Ⓑ Depth of rangehood chassis	19 11/16"
Ⓒ Distance between light centers	16 1/4"
Ⓓ Distance from center of lights to rear of chassis	1 5/8"
Ⓔ Rear bracket depth	1/8"

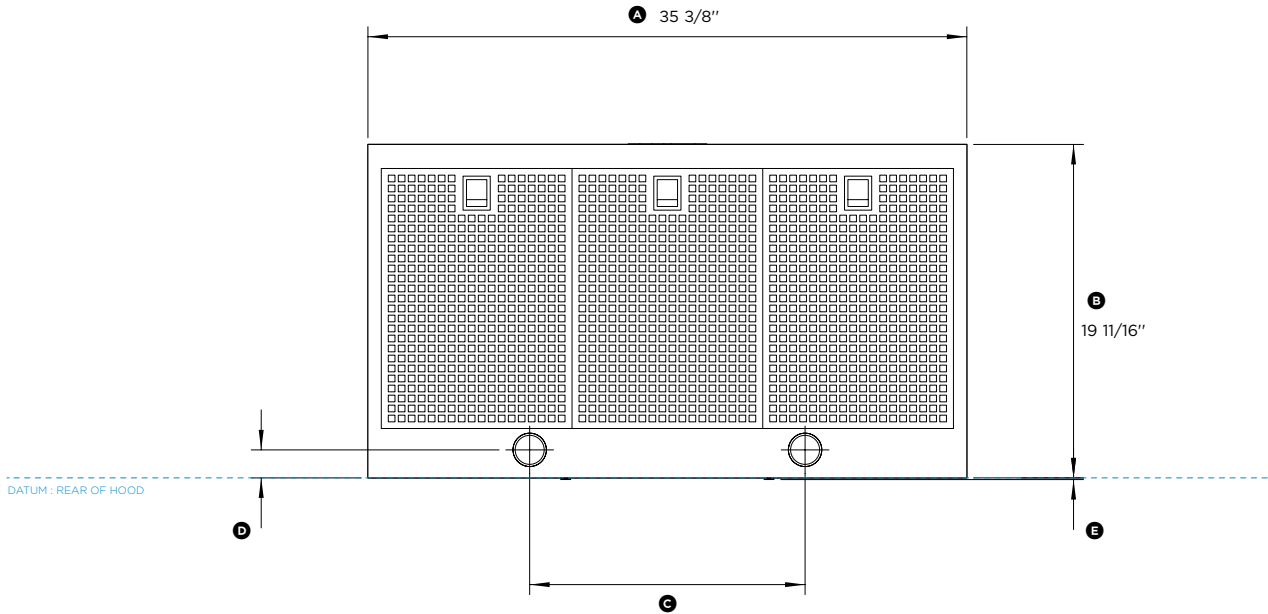

BOTTOM VIEW

INDICATES PRODUCT DATUM -----

DATE: 12.01.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)