



WC34 Series

The unique design of this chimney hood is accentuated by black glass panels on the front and back surfaces — providing a touch of elegance.

- Powered by the exclusive iQ Blower System™ 800 MAX blower CFM with GPS Technology for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood. Ultra-quiet 0.3 sones at normal setting.
- 4-speed electronic controls with a 10 minute delay-off feature keeps hood running after cooking to ensure smoke and odors have cleared the environment, and the filter clean reminder helps ensure optimal performance.
- Integrated LED modules provide even lighting over the cooktop.
- Quick release, dishwasher-safe mesh grease filters ensure clean, fresh kitchen.
- CRT Technology for Code Ready™ Technology (CRT) provides ability to reduce airflow to 300 or 400 CFM to address local codes or make-up air requirements.
- Optional recirculation kit for non-ducted capability.



best®


PERFORMANCE THAT INSPIRES

At **BEST**, we make high performance range hoods that perform beautifully. Astonishingly quiet. Impressively effective. Remarkably efficient. And perfectly suited for the most distinguished kitchens.

Whether it's the centerpiece of the room or letting its surroundings shine, **BEST** is where high-end performance inspires.

Installation height above the cooking surface: 24"-30"

Telescopic flue for 8'-9' ceiling is standard.
Optional flue extensions for 10'-11' ceiling.
Upper flue can be reversed to hide louvers in some applications depending on installation heights.

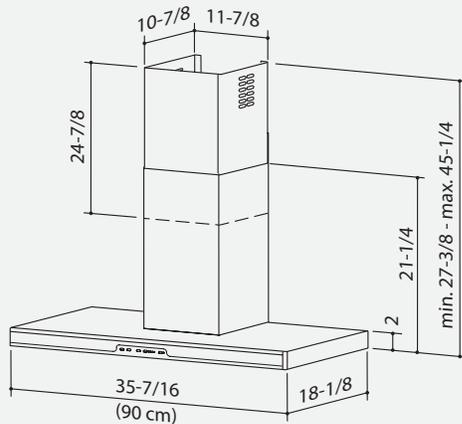

If needed, ask a recommended installer to limit discharge to 300 or 400 CFM.

HOOD SIZES*

Internal Blower, Single - Depth 18-1/8"

36" WC34IQ90SB

External (blower sold separately) - Depth 18-1/8"

36" WC34E90SB

* For exact dimensions, please refer to the technical drawing of each model.

FEATURES

Finish	Brushed Stainless Steel (Grade 430)
Lighting Type	LED 6W, 3000K
Number of Lamps	2
Lighting Levels	1
Lighting Lamps Included	Yes
Control Type	4-speed Electronic Pushbutton
Control Features	Heat Sentry, [™] Delay Off, Filter Clean Reminder
Remote Control	Optional ACR3
Filter Type	Mesh Grease
Non-ducted Capability	Yes

HOOD BLOWER INCLUDED WC34IQ

Internal	iQ6
Max Blower CFM*	800

HOOD BLOWER OPTIONS (blowers sold separately)

Refer to external blower's specification sheets for HVI performance (sones and CFM).

	ILB3	ILB6	ILB9	ILB11
External In-line				
Max Blower CFM*	300	675	900	1500
External Exterior	EB6	EB9	EB12	EB15
Max Blower CFM*	665	890	1300	1650

ACCESSORIES

10'-11" Flue Extension	AEWC345IQSBN
Non-Duct Kit	ANKWC345
Non-Duct Filter	AFCWC345
Universal MUA Damper	MD6TU, MD8TU, MD10TU (Requires Fresh Air Inlet)
Fresh Air Inlet	641FA, 643FA, 610FA

INSTALLATION REQUIREMENTS

Amps @ 120V: Internal Blower	4.0
Amps @ 120V: External Blower	7.0 Max
Electrical Connection	Plug In
Duct Size: Internal Blower	8"
Duct Size: External Blower	8"
Duct Direction	Vertical
Backdraft Damper	Included

*MAX Blower CFM indicates the performance of the hood blower in open air.

HVI PERFORMANCE


INTERNAL BLOWER - WC34IQ

SONES			
Normal	Medium*	High*	Boost
<0.3	1.4	4.5	9.0

CFM				
Normal	Medium*	High*	Boost	Boost
110	230	365	0.25 in. w.g.	0.1 in. w.g.
			450	500

* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.

AIRFLOW PERFORMANCE

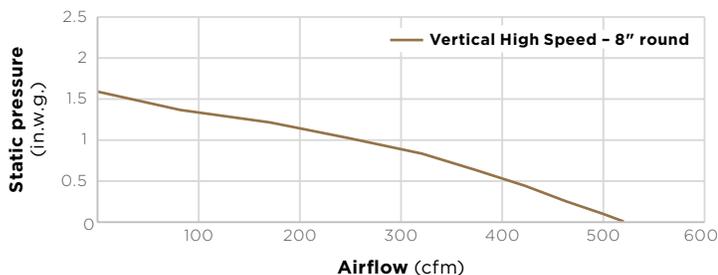

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at .01 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



BESTRANGEHOODS.COM
USA 800-558-1711

BESTRANGEHOODS.CA
CANADA 800-567-3855

