

## **36-INCH INDUCTION COOKTOP**

DTI36P876BB | TRANSITIONAL STYLE



# **FEATURES & BENEFITS**

- → Flex Zone<sup>™</sup> a large open area offers greater flexibility for cooking multiple dishes at one time. Easily accommodates various cookware sizes.
- → Up to 5 cooking zones with Flex Zone™.
- Touch control allows easy access to cooktop functions including power boost.
- → Smart Connectivity auto connects to hood.
- Child safety lock.
- → Residual heat reminder.
- → Dacor iQ Kitchen app enables monitoring of the cooktop from outside the kitchen.

## **GENERAL PROPERTIES**


CONTROLS

TOUCH CONTROL

FEATURES	
RESIDUAL HEAT INDICATOR	2 STAGE
CHILD LOCK	YES
KITCHEN TIMER	YES
PAUSE	YES
POWER LEVEL SETTING	13 + 2 POWER BOOST
QUICK STOP	YES
SIMMER/MELT	YES
POWER ON/OFF	YES
ADDITIONAL FEATURES	
AUTO PAN DETECTION	YES
SOUND ON/OFF	YES
DEMO MODE	YES
BLUETOOTH CONNECT	YES
WIFICONNECT	YES
HOOD CONNECTIVITY ON/OFF	YES
ELEMENT PERFORMANCE	
TOTAL NUMBER OF COOKTOP ZONES	5
FLEX ZONE LEFT FRONT (W)	1800W / 2600W (B)
FLEX ZONE LEFT REAR (W)	1800W / 2600W (B)
POWER COIL CENTER (W)	3600W / 4800W (B)
RIGHT REAR (W)	1400W / 1800W (B)
RIGHT FRONT (W)	2200W/3200W (B)
ELEMENT SIZE	
FLEX ZONE (EACH)	7 19/20"W X 15 6/25"D
CENTER HEATING ELEMENT	7"/11" POWER COIL™
RIGHT FRONT HEATING ELEMENT	8"
RIGHT REAR HEATING ELEMENT	6"
TECHNICAL DETAILS	
WATTS (W)	10.8 KW
VOLTS (V)	240
CIRCUIT BREAKER (A)	45
FREQUENCY (HZ)	60
ENERGY SOURCE	ELECTRIC
DIMENSIONS	
APPLIANCE DIMENSIONS (W X H X D) (IN.)	36" X 4" X 21 1/4"
REQUIRED CUTOUT SIZE (W X D) (IN.)	33 7/8" X 19 1/8"
MINIMUM DISTANCE	
FROM COUNTER FRONT	1 1/2"
(IN.) MINIMUM DISTANCE FROM REAR WALL (IN.)	11/8"
WARRANTY	
LIMITED, PARTS AND LABOR	2 YEARS




## APPLIANCE DIMENSIONS




APPLIANCE DIMENSIONS		
А	21 1/4" (540MM)	FRAME DEPTH
В	36" (914MM)	FRAME WIDTH
С	19" (483M)	CASE DEPTH
D	33 3/4" (857MM)	CASE WIDTH
Е	4" (101MM)	CONDUIT CASE HEIGHT
F	3 1/8" (81MM)	CASE HEIGHT

## COUNTERTOP CUTOUT DIMENSIONS

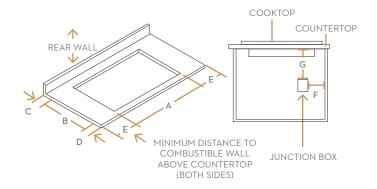

COUNTERTOP CUTOUT DIMENSIONS		
А	33 7/8" - 34" (860 mm - 864 mm)	
В	19 1/8" - 19 3/16" (485 mm - 487 mm)	
С	Min 1 1/8" (28 mm). Between cutout and the wall behind the cooktop	
D	Min 1 1/2" (38 mm). From front edge of cutout and front edge of countertop	
E	Min 1" (26 mm). Distance nearest left and right side combustible surface above cooktop	
F	Junction box or outlet 10" (254 mm) maximum from right-hand side of cabinet	
G	Junction box or outlet 15" (381 mm) minimum from bottom of countertop	

## WALL OVEN UNDERCOUNTER CUTOUT DIMENSIONS



- \* See built-in oven installation for complete installation instructions. See label on top of approved builtin oven models.
- \*\* Refer to installation manual of oven.