

Project Name:	
Location:	
Item #:	Qty:
Model:	

# **SELF-CONTAINED OUTDOOR ICE MACHINE**

**MODEL:** 

MIM50-0



pounds of ice per day (under ideal conditions). These stylish, easy to install models are built with durable all-stainless steel construction that make them perfect for any outdoor freestanding or built-in application.

The Maxx Ice MIM50-0 outdoor ice machine produces up to 65

#### FEATURES AND CONSTRUCTION ——

- All stainless steel exterior
- Air-cooled compressor
- Solid state controls
- Built-in self cleaning mode
- Automatic overflow prevention
- 25 lb storage bin
- Field reversible door
- Adjustable durable feet
- Includes ice scoop and tubing for supply and drain lines

#### DAILY ICE PRODUCTION -

Air Temp 70°F (21°C) / Water Temp 50°F (10°C) MIM50-0 ...... 65 lbs (29.5 kg)

Air Temp 90°F (32°C) / Water Temp 70°F (21°C) MIM50-0 ..... 51 lbs (23 kg)

#### ICE BIN STORAGE CAPACITY —

MIM50-0 ...... 25 lbs (11 kg)

## **ELECTRIC** -

115V / 60Hz / 1Ph (230V / 50-60Hz / 1Ph is available as an option) 6' (2m) NEMA 5-15P cord set inculded



NEMA 5-15P

## **3RD PARTY APPROVALS -**











Certified to ANSI UL 563 DOE 2018 Compliant

Meets Energy Star Guidelines Zero Ozone Depletion Potential

# MAXX ICE WARRANTY (USA / CANADA) -


Contact Maxx Ice for warranty statement at TechnicalServices@TheLegacyCompanies.com or 877.368.2797

## OPERATING REQUIREMENTS —

Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C) Water Temperature Range .............. 41° to 90°F (5° to 32°C) Water Usage per 100 lbs of ice...... 13.8 Gallons (52.2L) Water Supply Line Connection ....... 1/4" O.D. Compression Water Pressure Range:

Min PSI 1	5	Max PSI	.75*			
Min Bar 1	.0	Max Bar	.5.5			
*Above 75 PSI requires a regulator						
Energy Consumption p	er 100 lbs of	ice:				

MIM50-0 ...... 10.1 kWh/100 lbs

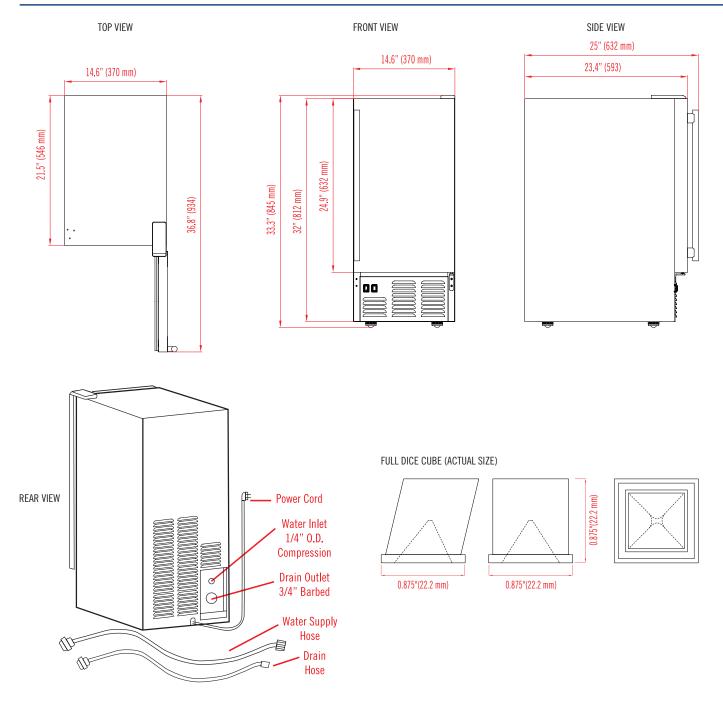

MODEL		EXTERNAL Dimensions	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN STORAGE Capacity	NET WEIGHT / Shipping Weight	AMP DRAW (Making / Harvesting)	REFRIGERANT And Charge Size	ELECTRICAL
MIM50-	-0	14.6" x 25" x 33.3" (370 x 632 x 845 mm)	65 lbs (29.5 kg)	25 lbs (11 kg)	83 lbs (37 kg) 93 lbs (42 kg)	3A / 4A	R-134a 3.88oz (110g)	115V / 60Hz / 1Ph

# **INSTALLATION** -

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended